

MSATS - Technical Specification - October 2025

~~1.01~~ **1.02 April-May 2025**


Pre-production: Tuesday 2 September 2025

Production: Sunday 26 October 2025

Rules effective: 26 October – 1 December
2025

Release series: MSATSMR261025



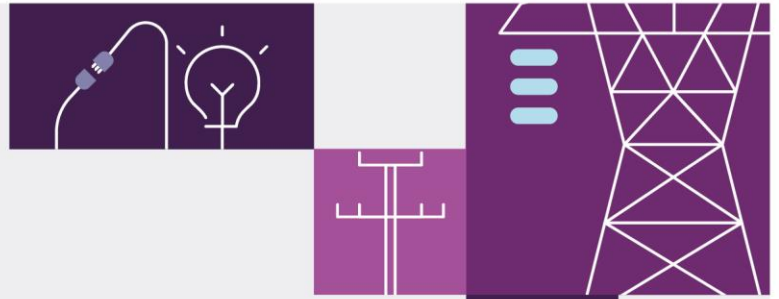

Important notice

Purpose & audience

This document describes the technical changes required to participant's systems for the MSATS - Technical Specification - October 2025 (Release). The Australian Energy Market Operator (AEMO) provides this information as a **service** targeting business analysts and IT staff in participant organisations. It provides guidance about the changes to their market systems under the Electricity Rules (Rules), as at the date of publication.

How to use this document

- If you have questions about the business aspects of these changes, please see Consultations on AEMO's website.
- The references listed throughout this document are primary resources and take precedence over this document.
- Unless otherwise stated, you can find resources mentioned in this guide on AEMO's website.
- **Text in this format** is a link to related information. Some links require access to MarketNet.
- **Text in this format**, indicates a reference to a document on AEMO's website.
- **Text in this format** is an action to perform in the Markets Portal.
- This document is written in plain language for easy reading. Where there is a discrepancy between the Rules and information or a term in this document, the Rules take precedence.
- Glossary Terms are capitalised and have the meanings listed against them in the Glossary.
- Rules Terms have the meaning listed against them in the **National Electricity Rules** (Rules).

Privacy and legal notices

The material in this publication may be used in accordance with the **privacy and legal notices** on AEMO's website.

Trademark Notices

Microsoft, Windows and SQL Server are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

Oracle and Java are registered trademarks of Oracle and/or its affiliates.

UNIX is a registered trademark of The Open Group in the US and other countries.

© 2015 Google Inc, used with permission. Google and the Google logo are registered trademarks of Google Inc.

Distribution

Available to the public.

Document Identification

Prepared by: AEMO Digital

Last update: ~~Friday, 16 May 2025~~ **Tuesday, 13 May 2025 12:02 PM**~~10:16 AM~~


Version History

~~1.0~~**1.02** In progress

Documents made obsolete

The release of this document changes only the version of MSATS - Technical Specification - October 2025.

Support Hub



To contact AEMO's Support Hub use Contact Us on AEMO's website or for urgent matters phone 1300 AEMO 00 (1300 236 600).

Contents

1	Introduction	20
1.1	Audience.....	20
1.2	Objective.....	20
1.3	Status	20
1.4	Release dates	20
1.5	Projects and enhancements	21
1.6	Forums and meetings	21
1.6.1	MSUG meetings.....	21
1.6.2	NEM Reform program stakeholder engagement.....	22
1.6.3	Electricity Retail Consultative Forum.....	22
1.7	Rule and procedure changes	22
1.8	Related technical specifications	23
1.9	Related software	23
1.10	Related documents.....	23
1.11	Approval to change	24
1.12	Market systems user group meetings	24
1.13	Version numbers.....	24
1.14	Changes in this version	24
2	Proposed Timeline.....	26
3	Participant Impact	28
3.1	B2B impact.....	28
3.2	B2M impact.....	29
3.3	aseXML r46	30
3.3.1	aseXML B2B schema r46.....	30
3.3.2	B2B schema transforms	31
3.3.3	aseXML B2M schema r46	31
3.3.4	B2M aseXML schema preference lower than r46.....	31
3.3.5	B2M aseXML schema transition.....	31
3.3.6	aseXML schema change impact summary.....	31
3.3.7	BuildingOrPropertyName element transition	32
3.4	AEMO MSATS configurable code fields	32



3.5	ROLR reports.....	32
4	Enhancements	33
4.1	High-level changes	33
4.2	Legacy meter replacement plan (LMRP)	37
4.3	Site defects	37
4.4	Shared fuse meter replacement.....	37
4.5	Embedded network settlement anomalies	38
4.6	ICF077 auto populate LCCD field for new NMIs	38
4.7	ICF078 address data enhancements.....	38
4.8	IEC - B004/22 - align B2B field lengths to the Australian Standard.....	39
4.9	IEC - B002/22 – align B2B and B2M field elements	39
4.10	ICF-079 NEM12 MDFF inconsistencies	39
4.11	Retailer of last resort reports	39
4.12	Meter testing, inspections, and malfunctions	39
5	B2B.....	41
5.1	B2B aseXML schema.....	41
5.1.1	Schema changes summary	41
5.2	B2B browser.....	44
5.3	B2B transactions	45
5.4	B2B validation module.....	45
6	B2M	47
6.1	B2M aseXML schema	47
6.1.1	Schema changes summary	47
6.1.2	B2M schema release implementation	49
6.1.3	Set Site Defect fields to a null value.....	50
6.2	Blind update tool.....	50
6.2.1	csv submission example	51
6.2.2	BUT interfaces.....	51
6.3	MSATS standing data.....	51
6.3.1	CATS standing data	51
6.4	CATS reports	52
6.5	Change requests and notifications	52
6.5.1	LMRP.....	52
6.5.2	Site defects	52

6.5.3	Embedded network settlement anomalies	53
6.5.4	ICF-077 Auto populate LCCD field for new NMIs	53
6.5.5	ICF-078	53
6.6	NMI master and NMI master summary interfaces	54
6.7	RM29 standing data quality report.....	54
6.7.1	LMRP IS NULL query	54
6.7.2	LMRP IN PAST query	55
6.8	Meter exemptions	55
6.8.1	Meter malfunction exemption types.....	55
6.8.2	MSATS web portal > Meter exemptions	56
6.8.3	Metering Exemptions API.....	57
6.8.4	Validation rules	57
7	ROLR Reports	59
7.1	Process	59
7.2	New ROLR Reports.....	59
7.3	Discontinued ROLR reports	60
8	FAQs.....	62
8.1	Why is AEMO updating the hazard field?	62
8.2	When will the draft r46 schema be available?	62
8.3	How do I find the latest electricity schema?.....	62
8.4	Is an aseXML schema version specific to either gas or electricity?	62
8.5	When does a participant receive the new LCCD value?	62
8.6	Does the change request notification include the LCCD tag when the NMI status updates from G to A?.....	63
8.7	Why is the r46 aseXML schema being released on 26 October 2025, but the effective date is 1 December 2025?	63
8.8	How should participants send an address with 2 house numbers and 2 house number suffixes in B2B transactions between 26 October 2025 and 1 December 2025?	63
8.9	Why is the 4060 CR being created?	63
8.10	Why are embedded Network Child NMIs only allowed to be prospectively changed?....	64
8.11	Are other NMIs affected by the new 4060 CR?	64
8.12	When do Site Defects details get removed in MSATS?.....	64
9	Implementation	69
9.1	Transition	69
9.2	Upgrade options.....	69

9.3	Implications	69
9.4	Risks.....	69
10	Terms.....	70
10.1	Rules Terms	70
10.2	Glossary.....	71
11	References.....	73
A1.	aseXML r46 Draft Files and Changes	74
A2.	Version history.....	98
	v1.01	98
	v1.00	98
	v0.03	98
1	Introduction.....	17
1.1	Audience.....	17
1.2	Objective	17
1.3	Status	17
1.4	Release dates.....	17
1.5	Projects and enhancements.....	18
1.6	Forums and meetings	18
	1.6.1 MSUG meetings.....	18
	1.6.2 NEM Reform program stakeholder engagement.....	19
	1.6.3 Electricity Retail Consultative Forum.....	19
1.7	Rule and procedure changes.....	19
1.8	Related technical specifications.....	20
1.9	Related software.....	20
1.10	Related documents	20
1.11	Approval to change	21
1.12	Market systems user group meetings.....	21
1.13	Version numbers	21
1.14	Changes in this version	21
2	Proposed Timeline.....	23
3	Participant Impact.....	25
	3.1 B2B impact.....	25
	3.2 B2M impact.....	26



3.3	aseXML r46	27
3.3.1	aseXML B2B schema r46	27
3.3.2	B2B schema transforms	28
3.3.3	aseXML B2M schema r46	28
3.3.4	B2M aseXML schema preference lower than r46	28
3.3.5	B2M aseXML schema transition	28
3.3.6	aseXML schema change impact summary	28
3.3.7	BuildingOrPropertyName element transition	29
3.4	AEMO MSATS configurable code fields	29
3.5	ROLR reports	29
4	Enhancements	30
4.1	High-level changes	30
4.2	Legacy meter replacement plan (LMRP)	34
4.3	Site defects	34
4.4	Shared fuse meter replacement	34
4.5	Embedded network settlement anomalies	35
4.6	ICF077 auto-populate LCCD field for new NMIs	35
4.7	ICF078 address data enhancements	35
4.8	IEC - B004/22 - align B2B field lengths to the Australian Standard	36
4.9	IEC - B002/22 - align B2B and B2M field elements	36
4.10	ICF-079 NEM12 MDFF inconsistencies	36
4.11	Retailer of last resort reports	36
4.12	Meter testing, inspections, and malfunctions	36
5	B2B	38
5.1	B2B aseXML schema	38
5.1.1	Schema changes summary	38
5.2	B2B browser	41
5.3	B2B transactions	42
5.4	B2B validation module	42
6	B2M	44
6.1	B2M aseXML schema	44
6.1.1	Schema changes summary	44
6.1.2	B2M schema release implementation	46
6.1.3	Set Site Defect fields to a null value	47



6.2	Blind update tool	47
6.2.1	csv submission example	48
6.2.2	BUT interfaces	48
6.3	MSATS standing data	48
6.3.1	CATS standing data	48
6.4	CATS reports	49
6.5	Change requests and notifications	49
6.5.1	LMRP	49
6.5.2	Site defects	49
6.5.3	Embedded network settlement anomalies	50
6.5.4	ICF-077 Auto-populate LCCD field for new NMIs	50
6.5.5	ICF-078	50
6.6	NMI master and NMI master summary interfaces	51
6.7	RM29 standing data quality report	51
6.7.1	LMRP_IS_NULL query	51
6.7.2	LMRP_IN_PAST query	52
6.8	Meter exemptions	52
6.8.1	Meter malfunction exemption types	52
6.8.2	MSATS web portal > Meter exemptions	53
6.8.3	Metering Exemptions API	54
6.8.4	Validation rules	54
7	ROLR Reports	56
7.1	Process	56
7.2	New ROLR Reports	56
7.3	Discontinued ROLR reports	57
8	FAQs	59
8.1	Why is AEMO updating the hazard field?	59
8.2	When will the draft r46 schema be available?	59
8.3	How do I find the latest electricity schema?	59
8.4	Is an aseXML schema version specific to either gas or electricity?	59
8.5	When does a participant receive the new LCCD value?	59
8.6	Does the change request notification include the LCCD tag when the NMI status updates from G to A?	59
8.7	Why is the r46 aseXML schema being released on 26 October 2025, but the effective date is 1 December 2025?	60



8.8	How should participants send an address with 2 house numbers and 2 house number suffixes in B2B transactions between 26 October 2025 and 1 December 2025?	60
8.9	Why is the 4060 CR being created?	60
8.10	Why are embedded Network Child NMs only allowed to be prospectively changed?	61
8.11	Are other NMs affected by the new 4060 CR?	61
8.12	When do Site Defects details get removed in MSATS?	61
9	Implementation	66
9.1	Transition	66
9.2	Upgrade options	66
9.3	Implications	66
9.4	Risks	66
10	Terms	67
10.1	Rules Terms	67
10.2	Glossary	68
11	References	70
A1.	aseXML r46 Draft Files and Changes	71
A2.	Version history	95
	v1.01	95
	v1.00	95
	v0.03	95
1	Introduction	8
1.1	Audience	8
1.2	Objective	8
1.3	Status	8
1.4	Release dates	8
1.5	Projects and enhancements	9
1.6	Forums and meetings	9
	1.6.1 MSUG meetings	9
	1.6.2 NEM Reform program stakeholder engagement	10
	1.6.3 Electricity Retail Consultative Forum	10
1.7	Rule and procedure changes	10
1.8	Related technical specifications	11
1.9	Related software	11
1.10	Related documents	11

1.11	Approval to change	12
1.12	Market systems user group meetings	12
1.13	Version numbers	12
1.14	Changes in this version	12
2	Proposed Timeline	14
3	Participant Impact	16
3.1	B2B impact	16
3.2	B2M impact	17
3.3	aseXML r46	18
3.3.1	aseXML B2B schema r46	18
3.3.2	B2B schema transforms	18
3.3.3	aseXML B2M schema r46	19
3.3.4	B2M aseXML schema preference lower than r46	19
3.3.5	B2M aseXML schema transition	19
3.3.6	aseXML schema change impact summary	19
3.3.7	BuildingOrPropertyName element transition	20
3.4	AEMO MSATS configurable code fields	20
3.5	ROLR reports	20
4	Enhancements	21
4.1	High-level changes	21
4.2	Legacy meter replacement plan (LMRP)	25
4.3	Site defects	25
4.4	Shared fuse meter replacement	25
4.5	Embedded network settlement anomalies	26
4.6	ICF077 auto populate LCCD field for new NMIs	26
4.7	ICF078 address data enhancements	26
4.8	IEC - B004/22 - align B2B field lengths to the Australian Standard	26
4.9	IEC - B002/22 - align B2B and B2M field elements	27
4.10	ICF-079 NEM12 MDFF inconsistencies	27
4.11	Retailer of last resort reports	27
4.12	Meter testing, inspections, and malfunctions	27
5	B2B	29
5.1	B2B aseXML schema	29
5.1.1	Schema changes summary	29



5.2	B2B browser	31
5.3	B2B transactions	32
5.4	B2B validation module	32
6	B2M	34
6.1	B2M aseXML schema	34
6.1.1	Schema changes summary	34
6.1.2	B2M schema release implementation	36
6.1.3	Set Site Defect fields to a null value	37
6.2	Blind update tool	37
6.2.1	BUT interfaces	37
6.3	MSATS standing data	37
6.3.1	CATS standing data	37
6.4	CATS reports	38
6.5	Change requests and notifications	38
6.5.1	LMRP	38
6.5.2	Site defects	38
6.5.3	Embedded network settlement anomalies	39
6.5.4	ICF-077 Auto populate LCCD field for new NMIs	39
6.5.5	ICF-078	39
6.6	NMI master and NMI master summary interfaces	40
6.7	RM29 standing data quality report	40
6.8	Meter exemptions	40
6.8.1	Meter malfunction exemption types	41
6.8.2	MSATS web portal > Meter exemptions	41
6.8.3	Metering Exemptions API	42
6.8.4	Validation rules	42
7	ROLR Reports	44
7.1	Process	44
7.2	New ROLR Reports	44
7.3	Discontinued ROLR reports	45
8	FAQs	46
8.1	Why is AEMO updating the hazard field?	46
8.2	When will the draft r46 schema be available?	46
8.3	How do I find the latest electricity schema?	46



8.4	Is an aseXML schema version specific to either gas or electricity?	46
8.5	When does a participant receive the new LCCD value?	46
8.6	Does the change request notification include the LCCD tag when the NMI status updates from G to A?	46
8.7	Why is the r46 aseXML schema being released on 26 October 2025, but the effective date is 1 December 2025?	47
8.8	How should participants send an address with 2 house numbers and 2 house number suffixes in B2B transactions between 26 October 2025 and 1 December 2025?	47
8.9	Why is the 4060 CR being created?	48
8.10	Why are embedded Network Child NMIs only allowed to be prospectively changed?	49
8.11	Are other NMIs affected by the new 4060 CR?	49
8.12	The new Defect Flag, Defect Type, and Defect Issuing MC fields are not mentioned in MSATS Procedures – Principles and Obligations for all Connection Points for CR 3004/3005 or CR 3090/3091. Does this mean the fields are not included in these CRs?	49
9	Implementation	54
9.1	Transition	54
9.2	Upgrade options	54
9.3	Implications	54
9.4	Risks	54
10	Terms	55
10.1	Rules Terms	55
10.2	Glossary	56
11	References	58
A1.	aseXML r46 Draft Files and Changes	59
A2.	Version history	86
	v1.01	86
	v1.00	86
	v0.03	86
1	Introduction	8
1.1	Audience	8
1.2	Objective	8
1.3	Status	8
1.4	Release dates	8
1.5	Projects and enhancements	9
1.6	Forums and meetings	9

1.6.1	MSUG meetings	9
1.6.2	NEM Reform program stakeholder engagement	10
1.6.3	Electricity Retail Consultative Forum	10
1.7	Rule and procedure changes	10
1.8	Related technical specifications	11
1.9	Related software	11
1.10	Related documents	11
1.11	Approval to change	12
1.12	Market systems user group meetings	12
1.13	Version numbers	12
1.14	Changes in this version	12
2	Proposed Timeline	14
3	Participant Impact	16
3.1	B2B impact	16
3.2	B2M impact	17
3.3	aseXML r46	18
3.3.1	aseXML B2B schema r46	18
3.3.2	B2B schema transforms	18
3.3.3	aseXML B2M schema r46	19
3.3.4	B2M aseXML schema preference lower than r46	19
3.3.5	B2M aseXML schema transition	19
3.3.6	aseXML schema change impact summary	19
3.3.7	BuildingOrPropertyName element transition	20
3.4	AEMO MSATS configurable code fields	20
3.5	ROLR reports	20
4	Enhancements	21
4.1	High-level changes	21
4.2	Legacy meter replacement plan (LMRP)	25
4.3	Site defects	25
4.4	Shared fuse meter replacement	25
4.5	Embedded network settlement anomalies	26
4.6	ICF077 auto populate LCCD field for new NMIs	26
4.7	ICF078 address data enhancements	26
4.8	IEC - B004/22 - align B2B field lengths to the Australian Standard	26



4.9	IEC-B002/22-align B2B and B2M field elements	27
4.10	ICF-079 NEM12 MDFF inconsistencies	27
4.11	Retailer of last resort reports	27
4.12	Meter testing, inspections, and malfunctions	27
5	B2B	29
5.1	B2B aseXML schema	29
5.1.1	Schema changes summary	29
5.2	B2B browser	31
5.3	B2B transactions	32
5.4	B2B validation module	32
6	B2M	34
6.1	B2M aseXML schema	34
6.1.1	Schema changes summary	34
6.1.2	B2M schema release implementation	36
6.2	Blind update tool	37
6.2.1	BUT interfaces	37
6.3	MSATS standing data	37
6.3.1	CATS standing data	37
6.4	CATS reports	38
6.5	Change requests and notifications	38
6.5.1	LMRP	38
6.5.2	Site defects	38
6.5.3	Embedded network settlement anomalies	38
6.5.4	ICF-077 Auto populate LCCD field for new NMIs	39
6.5.5	ICF-078	39
6.6	NMI master and NMI master summary interfaces	40
6.7	RM29 standing data quality report	40
6.8	Meter exemptions	40
6.8.1	Meter malfunction exemption types	40
6.8.2	MSATS web portal > Meter exemptions	41
6.8.3	Metering Exemptions API	42
6.8.4	Validation rules	42
7	ROLR Reports	44
7.1	Process	44



7.2	New ROLR Reports	44
7.3	Discontinued ROLR reports	45
8	FAQs	46
8.1	Why is AEMO updating the hazard field?	46
8.2	When will the draft r46 schema be available?	46
8.3	How do I find the latest electricity schema?	46
8.4	Is an aseXML schema version specific to either gas or electricity?	46
8.5	When does a participant receive the new LCCD value?	46
8.6	Does the change request notification include the LCCD tag when the NMI status updates from G to A?	46
8.7	Why is the r46 aseXML schema being released on 26 October 2025, but the effective date is 1 December 2025?	47
8.8	How should participants send an address with 2 house numbers and 2 house number suffixes in B2B transactions between 26 October 2025 and 1 December 2025?	47
8.9	Why is the 4060 CR being created?	48
8.10	Why are embedded Network Child NMIs only allowed to be prospectively changed?	49
8.11	Are other NMIs affected by the new 4060 CR?	49
8.12	The new Defect Flag, Defect Type, and Defect Issuing MC fields are not mentioned in MSATS Procedures – Principles and Obligations for all Connection Points for CR 3004/3005 or CR 3090/3091. Does this mean the fields are not included in these CRs?	49
9	Implementation	54
9.1	Transition	54
9.2	Upgrade options	54
9.3	Implications	54
9.4	Risks	54
10	Terms	55
10.1	Rules Terms	55
10.2	Glossary	56
11	References	58
A1.	aseXML r46 Draft Files and Changes	59
A2.	Version history	86
	v1.01	86
	v1.00	86
	v0.03	86

1	Introduction	7
1.1	Audience	7
1.2	Objective	7
1.3	Status	7
1.4	Release dates	7
1.5	Projects and enhancements	8
1.6	Forums and meetings	8
1.6.1	MSUG meetings	8
1.6.2	NEM Reform program stakeholder engagement	9
1.6.3	Electricity Retail Consultative Forum	9
1.7	Rule and procedure changes	9
1.8	Related technical specifications	10
1.9	Related software	10
1.10	Related documents	10
1.11	Approval to change	11
1.12	Market systems user group meetings	11
1.13	Version numbers	11
1.14	Changes in this version	11
2	Proposed Timeline	13
3	Participant Impact	15
3.1	B2B impact	15
3.2	B2M impact	16
3.3	aseXML r46	17
3.3.1	aseXML B2B schema r46	17
3.3.2	B2B schema transforms	17
3.3.3	aseXML B2M schema r46	18
3.3.4	B2M aseXML schema preference lower than r46	18
3.3.5	B2M aseXML schema transition	18
3.3.6	aseXML schema change impact summary	18
3.4	AEMO MSATS configurable code fields	19
3.5	ROLR reports	19
4	Enhancements	20
4.1	High-level changes	20
4.2	Legacy meter replacement plan (LMRP)	24



4.3	Site defects	24
4.4	Shared fuse meter replacement.....	24
4.5	Embedded network settlement anomalies	25
4.6	ICF077 auto-populate LCCD field for new NMIs	25
4.7	ICF078 address data enhancements.....	25
4.8	IEC – B004/22 – align B2B field lengths to the Australian Standard.....	25
4.9	IEC – B002/22 – align B2B and B2M field elements	26
4.10	ICF-079 NEM12 MDFF inconsistencies	26
4.11	Retailer of last resort reports	26
4.12	Meter testing, inspections, and malfunctions	26
5	B2B.....	28
5.1	B2B aseXML schema.....	28
5.1.1	Schema changes summary	28
5.1.2	Impact summary.....	30
5.2	B2B browser.....	31
5.3	B2B transactions	32
5.4	B2B validation module.....	32
6	B2M	34
6.1	B2M aseXML schema	34
6.1.1	Schema changes summary	34
6.1.2	B2M schema release implementation	36
6.2	Blind update tool.....	37
6.2.1	BUT interfaces.....	37
6.3	MSATS standing data.....	37
6.3.1	CATS standing data	37
6.4	CATS reports	38
6.5	Change requests and notifications	38
6.5.1	LMRP.....	38
6.5.2	Site defects	38
6.5.3	Embedded network settlement anomalies	38
6.5.4	ICF-077 Auto-populate LCCD field for new NMIs	39
6.5.5	ICF-078.....	39
6.6	NMI master and NMI master summary interfaces.....	40
6.7	RM29 standing data quality report.....	40

6.8	Meter exemptions	40
6.8.1	Meter malfunction exemption types	40
6.8.2	MSATS web portal > Meter exemptions	41
6.8.3	Metering Exemptions API	42
6.8.4	Validation rules	42
7	ROLR Reports	44
7.1	Process	44
7.2	Discontinued ROLR reports	44
8	FAQs	45
8.1	Why is AEMO updating the hazard field?	45
8.2	When will the draft r46 schema be available?	45
8.3	How do I find the latest electricity schema?	45
8.4	Is an aseXML schema version specific to either gas or electricity?	45
8.5	When does a participant receive the new LCCD value?	45
8.6	Does the change request notification include the LCCD tag when the NMI status updates from G to A?	45
8.7	Why is the r46 aseXML schema being released on 26 October 2025, but the effective date is 1 December 2025?	46
9	Implementation	47
9.1	Transition	47
9.2	Upgrade options	47
9.3	Implications	47
9.4	Risks	47
10	Terms	48
10.1	Rules Terms	48
10.2	Glossary	49
11	References	51
A1	Version history	52
v1.00	52	
v0.03	52	

1 Introduction

1.1 Audience

AEMO provides this information as a service targeting business analysts and IT staff in Registered Participant companies.

The primary audience for this technical specification is B2B and B2M Retail Market Participants.

1.2 Objective

The MSATS - Technical Specification - October 2025 (Release) describes the projects planned by AEMO from a participant perspective and includes any system related changes for participants.

1.3 Status

Version	Status
1.01 1.02	In progress. The design is not ready for participants' builds.
<u>1.01</u>	<u>In progress. The design is not ready for participants' builds.</u>
1.00	In progress. The design is not ready for participants' builds.
0.03	 Initial draft for review. The design is not ready for participants' builds. Presents the MSATS - Technical Specification - October 2025 evolving design. Please send feedback to Contact Us. In the Details of your enquiry section, mention the DCC Knowledge Management team as the Resolver group.

1.4 Release dates

Scheduled for implementation in:

- Pre-production: Tuesday 2 September 2025

- Production: Sunday 26 October 2025

1.5 Projects and enhancements

Changes and enhancements for this Release include:

Project	Description	Type
MSR Package 1	Procedural and technical changes for the Retail market which includes: - Accelerated LMRP - Site Defects	Project
Embedded Network Settlement Anomalies	CATS Change Requests restricted from updating embedded network child NMI datastreams retrospectively	Project
ROLR reporting	Discontinue obsolete ROLR reports ROLR report delivery to the Participant File Server	Enhancement
ICF_077	Last Consumer Change Date (LCCD) auto populated in MSATS based on NMI status	Enhancement
ICF_078	Update NEM address element definitions as a result of B2M Procedures aligning with AS4590.1:2017 standard	Enhancement
IEC - B004/22	Update B2B field lengths according to B2B Procedures aligning with AS4590.1:2017 standard	Enhancement
IEC - B002/22	Address inconsistencies field, field lengths and associated enumerations in the B2M and B2B procedures and schemas	Enhancement
MSR Package 2	Meter Exemption changes to support new metering testing and inspection requirements	Project

1.6 Forums and meetings

1.6.1 MSUG meetings

The **Market Systems User Group** (MSUG) is an industry user group established to discuss NEM wholesale and retail IT systems releases. Its purpose is to facilitate the continuing improvement of AEMO's IT systems by seeking feedback and collaboration from participants.

It is open to all interested parties, with invitations sent to all Registered Participants. If you have a technical question for a project and want to attend the MSUG, so you get an invite, ask your company's support team to include your email address in their **AEMO Help Desk Bulletin (CRM)**.

1.6.2 NEM Reform program stakeholder engagement

Details about the NEM Reform Forums, Working Groups, and related AEMO forums: [NEM Reform Stakeholder Engagement](#).

1.6.3 Electricity Retail Consultative Forum

The [Electricity Retail Consultative Forum \(ERCF\)](#) provides a platform for participants operating in the NEM to participate in the enhancement of the Retail Electricity Market Procedures Framework (except B2B Procedures).

1.7 Rule and procedure changes

The following rules and procedures take precedence over technical specifications and guides.

Title	Status	Effective
B2B Procedures v3.9 Consultation	Final	1 December 2025
B2B Procedure: Technical Delivery Specification v3.9	Final	1 December 2025
B2B Procedure: Service Order Process v3.9	Final	1 December 2025
B2B Procedure One Way Notification Process v3.9	Final	1 December 2025
B2B Procedure Meter Data Process v3.9	Final	1 December 2025
B2B Procedure Customer and Site Details Notification Process v3.9	Final	1 December 2025
MSATS Procedures - Principles and Obligations for All Connection Points v7.1	Final	1 December 2025
Standing Data for MSATS v6.1	Draft	1 December 2025
National Electricity Amendment (Accelerating smart meter deployment) Rule 2024	Final	28 November 2024
Exemption Procedure Meter Installation Malfunctions v2.0	Amendment	1 December 2025
Metrology Procedure Part C v1.0	Draft	1 December 2025
National Electricity Amendment (Unlocking CER benefits through flexible trading) Rule 2024	Final	15 August 2024

1.8 Related technical specifications

None

1.9 Related software

Software	Change	Available
B2B Validation Module	See B2B Validation Module	Pre-production: Tuesday 2 September 2025
MSATS Participant Batchers	New version updated for aseXML schema r46	Production: Sunday 26 October 2025

1.10 Related documents

Once published, these resources take precedence over this technical specification.

These guides and resources are updated according to this technical specification and published for the pre-production Release Date.

Title	Description	Status
aseXML r46 schema release	aseXML r46 schema files	Final
B2B Mapping to aseXML	Describes the mapping between the MSATS B2B procedures and the B2B aseXML schema	Not started
B2M Mapping to aseXML	Describes the mapping between the MSATS B2M procedures and the B2M aseXML schema	Not started
Guide to MSATS B2B	Information about the B2B e-Hub functions available in the Market Settlement and Transfer System (MSATS)	Not started
Guide to MSATS Reports	Information about MSATS C1, C4, C7, and Snapshot reports	Not started
Guide to MSATS Web Portal	Information about the B2M functions available in the Market Settlement and Transfer System (MSATS) web portal	Not started
API portal	Blind Update API and Meter Exemptions API changes	Not started
Guide to Metering Exemptions	Information about submitting and managing metering exemptions in the MSATS web portal	Not started

1.11 Approval to change

Access to the [Markets Portal Help](#) requires a MarketNet connection. Please speak with your company's Participant Administrator if you require access.

AEMO is seeking Participant feedback from the Electricity Retail Consultative Forum (ERCF), B2B Working Group, and interested parties.

1.12 Market systems user group meetings

The Market Systems User Group (MSUG) is an industry user group established to discuss NEM wholesale and retail IT systems releases. Its purpose is to facilitate the continuing improvement of AEMO's IT systems by seeking feedback and collaboration from participants.

MSUG meetings are open to all interested parties, with invitations sent to all included on the distribution list. If you have a technical question for a project and want to attend the MSUG ask your company's support team to include your email address in their **AEMO Help Desk Bulletin (CRM)** distribution list.

1.13 Version numbers

AEMO releases new versions of this document as the technical requirements are streamlined.

Incremental version numbers such as 1.01, 2.01 and so on mean there is a minor change to the technical specification.

Major version numbers such as 1.00, 2.00 means there are substantial changes to the technical specification. Participants must carefully review these changes, detailed below.

1.14 Changes in this version

1.14 This version includes the following changes:

- Adds aseXML r46 Files and ChangesRenames LMRP field to LegacyMtrReplacementPlan
- Adds BuildingOrPropertyName element transition
- Adds ITWG FAQsFor Site Defects, removes proposed CR5300 Change Defect Information (Prospective)

- For Site Defects, revises Originating MC field to Defect Issuing MC
- Adds BUT payload example for submitting LMRP values
- Adds **ROLR report** information
- Adds details about RM29 Standing Data Quality report queries
- For Site Defects, changes OriginatingMC field to DefectIssuingMC
- Changes to CRs 3004/3005 and 3090/3091 details where the new meter is a COMMS* or MRAM
- Adds note about BuildingorPropertyName2 in **B2B aseXML schema impact summary**
- Updates version to several aseXML schema files

62 Proposed Timeline

Milestone	Date	Description
Approval required	n/a	For details, see Approval to change
Revised Technical Specification	January 2025	AEMO releases new versions of this document as the technical requirements are streamlined. During the project this document is the source of truth From the production release, the technical specification becomes final and the related documents become the source of truth Technical Specification Portal
Related Documents publication	Tuesday 2 September 2025	Release of guides and resources mentioned in Related documents
MSUG meeting	Thursday 6 February 2025	Market Systems User Group Meeting (MSUG) to review the technical specification and ask AEMO technical SMEs questions This date is tentative. The Knowledge Management Team provides the invitation prior to the meeting
Pre-production refresh	24 - 28 February 2025	Refresh of the EMMS pre-production system with data refreshed from the production system. An outage of up to five days can occur to the pre-production environment during this period. Participant access is not restricted, however, AEMO do not guarantee the pre-production data content or system availability. During the refresh, access to other AEMO systems such as AWEFS, EMMS, OPDMS, and STTM may be intermittently affected
Pre-production implementation	Tuesday 2 September 2025	AEMO implements components of the Release to pre-production for participant testing AEMO has full access to the system during this period Participant access is not restricted; however, the data content or system availability is not guaranteed
Pre-production available	Tuesday 9 September 2025	Testing period begins for participants
Participant Testing	9 September 2025 - 28 November 2025	Unstructured participant testing in the pre-production environment
Production implementation	Sunday 26 October 2025	AEMO implements the release to production

Proposed Timeline

Milestone	Date	Description
Production systems available	Sunday 26 October 2025	Production systems available to participants

73 Participant Impact

To comply with this Release, participants must:

- 1. Decide if you need to implement B2B schema transforms. For help, see [B2B Browser](#) in Markets Portal Help.
- 2. Schedule staff and resources to upgrade your B2B and B2M aseXML schemas to r46 For help, see Guide to Transition of aseXML.
- 3. Download and install upgraded software versions. For help, see Related software.

7.13.1 B2B impact

Item	Project or enhancement	Changes
B2B aseXML schema	IEC enhancements	LMRP, Site Defects (One In All In), address and B2B field length alignment changes to support B2B Procedures v3.9
	Site Defects	
	LMRP	
	Shared Fusing Meter Replacement (One In All In)	
B2B Validation Module	Site defects	New permitted values for B2B transactions
	LMRP	
	IEC enhancements	
	Shared Fusing Meter Replacement (One In All In)	
B2B Browser	Site Defects	Updates to Create Transaction interfaces
	LMRP	
	IEC enhancements	
	Shared Fusing Meter Replacement (One In All In)	

Item	Project or enhancement	Changes
B2B transactions	Site Defects LMRP IEC enhancements	New: Service Order Request sub types for Metering Service Works and Supply Service Works. Updates: - Enumerated values for One Way Notification subtype Meter Faults and Issues Notification and Service Order Response - Field length for Service Order and Customer and Site Detail Notification fields, HazardDescription, FormNumber, and FormReference

7.23.2 B2M impact

Item	Project or enhancement	Change
aseXML B2M schema	ERCF and IEC enhancements LMRP Site Defects	New version
CATS NMI Standing Data	LMRP Site Defects	New CATS_NMI_DATA attributes: - LMRP - Defect Flag - Deflect type - Defect Issuing MC - BuildingorPropertyName2 Changes to address elements to align with AS4590.1:2017
Blind Update Tool (BUT)	LMRP	LMRP field to support initial population between 26 October 2025 to 27 November 2025 as per rule change
Change requests and notifications	LMRP Site Defects Embedded Network Settlement Anomalies ICF 077 and 078	New and updated CRs and notifications

Item	Project or enhancement	Change
CATS reports	LMRP Site Defects	Changes to CATS Reports (C1, C4, C7, C29) and MSATS Snapshot Report. It includes five new attributes: - LMRP - Defect Flag - Deflect type - Defect Issuing MC - BuildingorPropertyName2 Changes to address elements to align with AS4590.1:2017
Last Consumer Change Date (LCCD)	ICF077	AEMO auto-populates the LCCD field in the NMI create process, i.e. populate the NMI's LCCD with the activation date for NMIs moving from a greenfield status to active status

7.33.3 aseXML r46

r46 aseXML schema includes changes for MSR Package 1 and ERCF and B2B Working Group enhancements.

Effective 26 October 2025, participants affected by the B2M change in MSATS Procedures v7 must implement r46. This allows:

- Capturing changes to the LMRP value set by BUT through the CATS C1 ReportResponse.
- Ensuring B2M CRs referencing aseXML elements in MSATS Procedures v7.1 before 1 December 2025 fail validation in MSATS.

From the effective date 1 December 2025 with the MSR Package 1 Defect, ~~and~~ ICF changes, and B2B v3.9 Procedures changes, participants must implement r46 to meet defect and address alignment obligations.

For help transitioning, see [Transition of aseXML](#).

7.3.13.3.1 aseXML B2B schema r46

Current B2B aseXML schema	Superseded B2B aseXML schema
r46	r43

The r45 aseXML schema changes only applies B2B gas retail.

Gas participants are scheduled to adopt r45 in Q2 2026.

~~7.3.23.3.2~~ B2B schema transforms

Receiving version	Transforms
r46	r43 to r46
r43	r46 to r43

For details, see [B2B aseXML schema](#).

~~7.3.33.3.3~~ aseXML B2M schema r46

Latest	Current	Superseded
r46	r46	r44

If you are not ready to transition your B2M aseXML schema with AEMO:

1. Change your schema preference to Current before the Release Dates.
2. When AEMO transitions, we move you to the Superseded preference.
3. When ready, complete your upgrade and observe the processing is correct. You may still receive some older aseXML versions for a short time during the transition period, around 24 hours.
4. Change your schema preference to Current.

For details, see [B2M aseXML schema](#).

~~7.3.43.3.4~~ B2M aseXML schema preference lower than r46

For participants having a B2M aseXML schema preference lower than r46, the new aseXML items are removed from Message Responses with a comment flagging the removal in the transformed aseXML payload.

~~7.3.53.3.5~~ B2M aseXML schema transition

For details, see [B2M schema release implementation](#).

~~7.3.63.3.6~~ aseXML schema change impact summary

For details, see:

- [B2B aseXML schema](#)

- **B2M aseXML schema**

3.3.7 BuildingOrPropertyName element transition

The aseXML r46 schema introduces the use of single-occurrence elements BuildingOrPropertyName (primary) and BuildingOrPropertyName2 (secondary).

- In the BuildingOrPropertyName element, the maxOccurs="2" attribute remains to support two BuildingOrPropertyName values for B2B transaction until 30 November 2025. From the B2B Procedures effective date 1 December 2025, 2 values must be sent using the BuildingOrPropertyName and BuildingOrPropertyName2 elements.

7.43.4 AEMO MSATS configurable code fields

AEMO uses the CND_[nn] framework to map field names in the CATS_NMI_DATA table to the C1 CATS Transaction Field Validations report. Where possible, participants should use the procedural field names defined in Standing Data for MSATS.

Existing cats_nmi_data CND_nn fields are assigned to the following field names:

- Legacy Meter Replacement Plan = CND_14
- Defect flag = CND_15
- Defect Type = CND_16
- Defect Issuing MC = CND_17
- Building or Property Name 2 = CND_18

AEMO is increasing the CND_[nn] framework to cater for new fields in the future.

AEMO recommends participants do not hard code the AEMO MSATS configurable fields.

7.53.5 ROLR reports

Changes include:

- Discontinuing obsolete reports from 1 December 2025, as described in the ROLR Procedures.
- ROLR reports added to the CATS transaction group for delivery to the Participant File Outbox by API or FTP.

84 Enhancements

8.14.1 High-level changes

Function	Enhancement	Description	Impacted	MSATS functionality
MSATS standing data	LMRP Site Defects Building or Property Name 2	New CATS NMI standing data attributes	Entitled participant roles	NMI Standing Data
B2B transactions	LMRP Site defects IEC enhancements Shared Fuse Meter Replacement (One In All In)	Changes to: - Metering Service Works - Meter Fault and Issue Notification - Service Order Request with new subtypes	Initiating Participant roles and receiving roles	B2B
Blind Update Tool (BUT)	LMRP	New LegacyMtrReplacementPlan attribute	LNSP	B2M
B2B Browser	LMRP IEC enhancements Shared Fuse Meter Replacement (One In All In)	Create new transaction	Initiating Participant roles and receiving roles	B2B
CATS reports	LMRP Site defects ERCF enhancements	Updated MSATS C1, C4, C7, Snapshot reports	LNSP MC FRMP	B2M
SDQ queries	LMRP Site defects	New RM29 SDQ queries	MC	B2M

Function	Enhancement	Description	Impacted	MSATS functionality
Change Request (CR) and notifications	LMRP	Update CR 5050/5051 to support updates to LMRP value	Entitled Participant roles and initiating Participant roles	B2M
	Site defects			
	Embedded Network Settlement Anomalies	Update to CR 4050/4051 to exclude EN Child NMI datastreams New CR 4060 to update EN Child NMI datastreams		
MSATS Web Portal	LMRP	Includes new LMRP and site defect attributes	Entitled Participant roles and initiating Participant roles	B2M
	Site defects	Changes to address elements to align with AS4590.1:2017		
	ROLR reports	Changes to:		
	ERCF enhancements	- Create New Transaction interface - NMI Master interface - NMI Master Summary interface		

Function	Enhancement	Description	Impacted	MSATS functionality
B2B Browser	Site Defects	Changes to:	Initiating Participant roles and receiving roles	B2B
	ERCF and IEC enhancements Shared Fuse Meter Replacement (One In All In)	- Service Order Request, Metering Service Works transaction type - One Way Notification, Meter Fault and Issue Notification transaction type - B2B Service Order Response		
		New B2B Service Order Request subtypes: - Temporary Isolation-Scoping Request - Temporary Isolation-One In All In - Install Meter Isolation Device		
B2M schema	LMRP Site defects	New fields	Initiating Participant roles and receiving roles	B2M

Function	Enhancement	Description	Impacted	MSATS functionality
B2B schema	LMRP Site defects Shared Fusing Meter Replacement	Changes to: - Electricity enumerations - Service Order Response - Service Order Request, Metering Service Works transaction type - One Way Notification, Meter Fault and Issue Notification transaction type New B2B Service Order Request subtypes: - Temporary Isolation-Scoping Request - Temporary Isolation-One In All In - Install Meter Isolation Device	Initiating Participant roles and receiving roles	B2B
Common B2B and B2M schema	ICF-078 B004/22 B002/22	Address data enhancements for consistency and alignment to AS4590.1:2017 standard Align B2B and B2M field elements	Entitled Participant roles	B2B B2M – CATS
Blind Update Tool API	LMRP	New LMRP field		B2M

Function	Enhancement	Description	Impacted	MSATS functionality
Metering exemptions	Meter testing, inspections, and malfunctions	New exemption types and configuration data impacting the web interface and API New exemption validation rules	MC	B2M

8.24.2 Legacy meter replacement plan (LMRP)

The LMRP describes replacing all existing type 5 [\(excluding those with remote acquisition\)](#) and type 6 meters with type 4 (smart) meters by 30 ~~December~~ [November](#) 2030 in [the National Electricity Market. Queensland, New South Wales, Australian Capital Territory, and South Australia.](#)

To support this requirement, the LNSP in conjunction with applicable FRMP and MC is required to record and maintain the LMRP in MSATS.

8.34.3 Site defects

A final rule introduces a [new requirement for MSATS to to specify the information that must be recorded when an MC identifies a defect at the metering installation.](#) ~~n industry record-keeping process. This is triggered when a technician identifies an NMI defect.~~

[AEMO's MSATS Procedures requires](#) ~~The the~~ MC ~~is required~~ to record a Defect Flag, Defect type, and Defect Issuing MC in MSATS. ~~The FRMP can record notifications to customers to remediate site defects.~~

8.44.4 Shared fuse meter replacement

A final rule introduces a Shared Fusing Meter Replacement Procedure which defines a One In All In process for meter upgrades on a shared fuse. When the smart meter installation at an NMI requires the isolation of more than one customer at that NMI due to a shared network fusing arrangement, DNSPs, FRMPs, and MCs must coordinate efforts. This is required so that any legacy meters on the shared fuse are replaced at the same time.

For details of the One in All in process, see page 14 of the [B2B Procedures v3.9 Consultation](#).

For information about IT changes supporting share fusing meter replacement, see [High-level changes](#).

8.54.5 **Embedded network settlement anomalies**

The AEMC’s final rule determination Unlocking CER benefits through flexible trading, in agreement with AEMO that settlement anomalies with child NMIs can occur due to retrospective connections and disconnections.

The changes are:

- Limiting the ability for NMI datastreams in embedded networks to be activated or deactivated retrospectively.
- Continue to allow for retrospectively creating new Child NMIs.
- Continue to allow for retrospectively exchanging meters.

8.64.6 **ICF077 auto populate LCCD field for new NMIs**

In accordance with the CATS Procedures, all current financially responsible Market Participants (**FRMPs**) are obligated to maintain the Last Consumer Change Date (LCCD) field within MSATS. AEMO introduced the LCCD field to better support the Consumer Data Right Rule (**CDR Rule**) and enables customers to access data which can span multiple retailers for the same NMI.

AEMO proposes to auto-populate the LCCD field to maintain the NMI completion process, where an NMI status is updated from Greenfield “G” to Active “A”. This impacts FRMPs who maintain the LCCD field within MSATS.

8.74.7 **ICF078 address data enhancements**

This ICF aligns the address standard in B2M Procedures with the AS4590.1:2017 standard. It supersedes the current NEM addressing which is based on the AS4590-1999 standard.

This change request includes the following changes:

- Increase character lengths in key address fields for capturing detailed address information and avoiding data truncation.
- Update enumerated values for address elements. This enhancement provides more accurate and complete address data and consistent data standards between B2B and B2M.

8.84.8 IEC - B004/22 - align B2B field lengths to the Australian Standard

A parallel change to ICF078 to update address element definitions to AS4590.1:2017.

8.94.9 IEC - B002/22 – align B2B and B2M field elements

This change resolves inconsistencies in the field, field lengths and associated enumerations in the B2M and B2B procedures and schemas. This can impact key industry functions. For example, when a customer provides hazard details to the Retailer, the Retailer forwards this information to the applicable B2B participants.

8.104.10 ICF-079 NEM12 MDFF inconsistencies

Remove the inconsistency between clauses 4.4 and 4.5 of the Meter Data File Format Specification NEM12 & NEM13 (MDFF Specification) relating to the provision of 400 block data for actual reads.

8.114.11 Retailer of last resort reports

The AER initiates a Retailer of Last Resort (ROLR) event when a FRMP cannot support its financial obligations within the NEM. The ROLR reporting process is updated to improve the request and delivery of reports. The changes include:

- Discontinuing reports that are no longer required.
- Delivering ROLR reports to the Participant File Server outbox.

For details, see [ROLR Reports](#).

4.12 Meter testing, inspections, and malfunctions

MCs can apply for a malfunction exemption for metering installations when they cannot repair the metering installation within the timeframes defined in clause 7.8.10(a) of the NER.

The Final Rule removes the requirement for DNSPs to test their existing type 5 and type 6 meters during the acceleration phase of smart meter deployment. Additionally, all existing exemptions are included into the LMRP. Consequently, malfunctions during the acceleration phase only applies for type 1, type 2, type 3 and type 4 metering installations, and type 5 and type 6 meters within Victorian or Tasmanian jurisdictional areas.

NER amendments and Exemption Procedure Meter Installation Malfunction define the expected timeframe to rectify a metering installation malfunction. [AEMO has proposed changes to the Metering Installation Exemption Guideline in its consultation, which would streamline](#)

the MCs applying for a meter exemption process by which an MC can apply for an exemption.

The changes include:

- 4 new exemption types - Whole Current Connected NMI, LV CT Connected NMI, HV connected NMI, Family Failure and associated nature values.
- Deactivating old exemption type and nature configuration for the malfunction category.
- MSATS Web Portal - The meter exemptions interface new configuration field and checkbox for MCs to populate when raising an exemption.
- Automatic approval or rejection for some Whole Current Connected NMIs and Family Failure exemptions.
- Validation to restrict continual exemption for same NMI and exclusion of non-conforming participants from automated processing.

95 B2B

9.15.1 B2B aseXML schema

This schema release r46 affects B2B.

For help with schema transitions, see [Guide to Transition of aseXML](#).

For potentially impacted files, transactions, and versioned types for r46, see [Impact summary](#).

To obtain schemas, guidelines, whitepapers etc, see [aseXML Standards](#).

9.1.15.1.1 Schema changes summary

Affected files	New	Modified
aseXML_r46	n/a	Included file versions: - Common - Electricity - Electricity Enumerations - Transactions - Service Order - One Way Notification
Common_r46	n/a	HazardDescription – Increase maximum length from 80 to 100 characters

Affected files	New	Modified
Electricity_r46	Additional enumerated values for SORDResponseCode to support MP-initiated Service Orders Responses for defects and One In All In to FRMPs: - Appointment Required - Comms Refused - Coordination Failure - Defect - Demolished - Dog - Incorrect Service Order - Mismatch with Standing Data - Natural Event - No Access -- Network Support Required - Not FRMP - No Adult Present - Obstruction - Shared Fuse -- Scoping Required - Site Not Ready - Unable To Isolate - Unable To Locate Site New enumerated values for ServiceOrderSubType: - Temporary Isolation - Scoping Request: For supporting FRMP-initiated Service Orders to the DNSP for a One In All In shared fusing scoping request - Temporary Isolation One In All In: For supporting FRMP-initiated Service Orders to the DNSP for a One In All In shared fuse scoping request	The following values are updated to support the alignment of NEM B2M and B2B fields: - FormNumber – Increase maximum length from 15 to 20 characters - FormReference – Reduce maximum length from 30 to 20 characters -

Affected files	New	Modified
Electricity Enumerations	Enumerations for the LMRP and One In All In process: - RegClassification - PurposeOfRequest - SORDResponseCode Adds Remediation Advised to the enumerated list for PurposeOfRequest element, to support FRMP initiating Metering Service Works Service Orders Requests for defects to MPs Adds LegacyMtrReplacementPlan and One In All In to the enumerated list for ReasonForNotice element, to support DNSP initiated Meter Fault And Issue Notification One Way Notifications for shared fuse outages to an FRMP	n/a

9.2.0 Impact summary

Below are the potentially impacted files, transactions, and versioned types for r46.

There is no impact to Derived types for the B2B aseXML schema release.

Legend

- Modified types: All changed types.
- Derived types: Any types derived from a modified type, therefore modified by default.
- Versioned types affected: All versioned types needing the version attribute updated.
- Transactions potentially affected: All transactions containing a modified type, either directly or via a type substitution.
- Schema files affected: Schema files changed.

Affected schema file	Modified types	Affected version types	Potential affected transactions
aseXML	n/a	ClientInformation Electricity Enumerations	
ClientInformation	BuildingOrPropertyName BuildingOrPropertyName2 * FlatOrUnitType StreetName StreetType LocationDescriptor	AustralianStructuredAddressPartial Components	
Electricity	FormNumber FormReference HazardDescription	ServiceOrderRequest	
Electricity Enumerations	PurposeOfRequest ReasonForNotice		OneWayNotification
Enumerations	FloorOrLevelType	FloorOrLevel AustralianFloorOrLevelType	
Service Order	SORDResponseCode ServiceOrderType		ServiceOrderRequest

The BuildingOrPropertyName2 field already exists in r43 B2B schema but is currently mapped to BuildingOrPropertyName.

With the r46 schema change, the maxoccurs=2 attribute is removed from BuildingOrPropertyName, allowing BuildingOrPropertyName2 to be used. As a result, BuildingOrPropertyName can no longer occur more than once, and the additional element for providing building or property name information is BuildingOrPropertyName2.

9.635.2 B2B browser

The B2B Browser changes include:

- Updates to B2B transaction create, view, and edit interfaces to include enumerated values.
- New create, view, and edit interfaces to support Service Order transaction with new Sub Types.

9.645.3 B2B transactions

Enhancement	Transaction	Description
Site defects	Metering Service Works	- In the B2B Browser interface, a FRMP can set Purpose Of Request to Defect Resolved to notify the MP the customer has advised the defect is resolved - Updates to B2B Validation Module and ElectricityEnumerations.xsd in B2M schema to include Defect Resolved
Site defects	Service Order Response	- In the B2B Browser, an MP can set numerous SORDResponseCode to cover One In All In exemptionscan set SORDResponseCode to Defect to notify the FRMP the customer has been issued a defect notice - B2B Validation Module adds Defect to the list for SORDResponseCode - Adds Defect to the SORDResponseCode enumerated list in the Electricity_r44.xsd
Shared fuse meter replacement LMRP	Service Order Request	- FRMP can initiate Temporary Isolation - Scoping Request Service Orders for shared fusing to DNSP. - FRMP initiated Temporary Isolation – One In All In Request Service Orders and Install Meter Isolation Device for shared fuse to DNSP - Metering Service Works subtype Install Meter Isolation Device
Shared fuse meter replacement	One Way Notification	- DNSP can initiate Meter Fault And Issue Notification to FRMP for shared fuse outage

B2B transactions has changes to support the site defects process.

9.655.4 B2B validation module

The B2B Validation Module provides the following validations:

- LMRP and One In All In are permitted values for RegClassification
- Remediation Advised is a permitted value for PurposeOfRequest

- Permitted values for SORDResponseCode:
 - Appointment Required
 - Comms Refused
 - Coordination Failure
 - Defect
 - Demolished
 - Dog
 - Incorrect Service Order
 - Mismatch with Standing Data
 - Natural Event
 - No Access - - Network Support Required
 - Not FRMP
 - No Adult Present
 - Obstruction
 - Shared Fuse - - Scoping Required
 - Site Not Ready
 - Unable To Isolate
 - Unable To Locate Site
- One In All In is a permitted value for ReasonForNotice
- New validation rules when MCs update the Site Defect flag

~~106~~ B2M

~~10.16.1~~ B2M aseXML schema

This schema release r46 affects B2M.

For help with schema transitions, see [Guide to Transition of aseXML](#).

For potentially impacted files, transactions, and versioned types for r46, see [Impact summary](#).

To obtain schemas, guidelines, whitepapers etc, see [aseXML Standards](#).

~~10.1.16.1.1~~ Schema changes summary

Affected files	New	Modified
aseXML_r46	n/a	Included file versions: - ElectricityMasterStandingData - Enumerations - ClientInformation
ElectricityMasterStandingData_r46	Elements to support requirements related to the LMRP, Site Defects, and Site Defect Notifications: - LegacyMtrReplacementPlan - DefectFlag - Defect-Issuing-MC - Defect-Type	

Affected files	New	Modified
Enumerations	4 new enumerations: - <u>LL - LOWER LEVEL</u> - <u>PTHS - PENTHOUSE</u> - <u>PL - PLATFORM</u> - <u>PD - PODIUM</u> —Lower Level—LL —Penthouse—PTHS —Platform—PL —Podium—PDM	AustralianFloorOrLevelType - Maximum length updated from 2 to 4 characters Adds comment to describe the name mapping from AS4590.1:2017 to the aseXML for AustralianStreetName: - Name—AS4590.1:2017 abbreviation — aseXML Abbreviation - <u>Name</u> - <u>FRTL - FITR - FIRETRAIL</u> - <u>AV - AVE - AVENUE</u> - <u>CR - CRES - CRESCENT</u> - <u>GLDE - GLD - GLADE</u> —PWY - PKWY - PARKWAYAVENUE - AV - AVE —CRESCENT - CR - CRES —GLADE - GLDE - GLD —PARKWAY - PWY - PKWY —FIRETRAIL - FTRL - FITR - Adds comment to describe the name mapping from AS4590.1:2017 to the aseXML for AustralianFlatOrUnitType: - Name—AS4590.1:2017 abbreviation — aseXML Abbreviation - <u>Name</u> - <u>DUPL - DUP - DUPLEX</u> - <u>FCTY - FY - FACTORY</u> - <u>FLAT - F - FLAT</u> - <u>MBTH - MB - MARINE BERTH</u> - <u>OFFC - OFF - OFFICE</u> - <u>ROOM - RM - ROOM</u> - <u>STLL - SL - STALL</u> - <u>UNIT - U - UNIT</u> —WHSE - WE - WAREHOUSEDUPLEX - DUPL - DUP —FACTORY - FCTY - FY —FLAT - FLAT - F —MARINE BERTH - MBTH - MB —OFFICE - OFFC - OFF —ROOM - ROOM - RM —STALL - STLL - SL —UNIT - UNIT - U - <u>WAREHOUSE - WHSE - WE</u>

Affected files	New	Modified
ClientInformation_r46	New element BuildingOrPropertyName2	BuildingOrPropertyName - Updates maximum length from 30 to 50 characters - Removes the MaxOccurs value StreetName – Updates maximum character length from 30 to 45 characters FloorOrLevelType – Updates maximum character length from 2 to 4 characters

To minimise significant changes in participants' systems, AustralianStreetName and AustralianFlatOrUnitType retains certain enumerations rather than changing them as defined in AS4590.1:2017. The enumerations schema file includes comments to map the AS4590.1:2017 Abbreviation to the aseXML abbreviation.

10.1.26.1.2 B2M schema release implementation

During the pre-production and production implementations, participants' preferences for their B2M transaction receiving schema version is transitioned by AEMO in the MSATS Web Portal > Participants > Participant Schema as follows:

Before MSATS release			During implementation	After MSATS release	
Transaction group	B2M participant schema	Outbound schema version		B2M participant schema	Outbound schema version
CATS	LATEST	r44	AEMO transitions participants on LATEST to r46 for continued compliance	LATEST	r46
NMID	LATEST	r44		LATEST	r46
MDMT	LATEST	r44		LATEST	r46
CATS	CURRENT	r44	Participants on CURRENT remain on , with the setting	SUPERSEDED	r44

Before MSATS release			During implementation	After MSATS release	
Transaction group	B2M participant schema	Outbound schema version		B2M participant schema	Outbound schema version
NMID	CURRENT	r44	changed to Superseded. Participants can choose when to transition to the new Current/Latest setting	SUPERSEDED	r44
MDMT	CURRENT	r44			r44
CATS	SUPERSEDED	r43	AEMO transitions participants on the Superseded version r43 to the new Superseded version r44. r43 and earlier versions are unsupported; all responses return in r44	SUPERSEDED	r44
NMID	SUPERSEDED	r43		SUPERSEDED	r44
MDMT	SUPERSEDED	r43		SUPERSEDED	r44

6.1.3 Set Site Defect fields to a null value

To provide a null value for the DefectFlag, DefectType, and DefectIssuingMC fields, create a space between the element tags as shown in the following example.

```
<MasterData>
<DefectFlag> </DefectFlag>
<DefectType> </DefectType>
<DefectIssuingMC> </DefectIssuingMC>
</MasterData>
```

10.26.2 Blind update tool

The Blind Update Tool (BUT) has the following changes:

- LEGACY METER REPLACEMENT PLANLegacyMtrReplacementPlan field to support initial population between 26 October 2025 to 27 November 2025.

- Updates to the LEGACY METER REPLACEMENT PLAN ~~LegacyMtrReplacementPlan~~ values where the AER has approved amendments to the LMRP schedule over the acceleration period (2025-2030).
- ~~BUT has a payload limit of 100,000 rows per file and a daily limit of 400,000 rows.~~
- When the LEGACY METER REPLACEMENT PLAN ~~LegacyMtrReplacementPlan~~ attribute is set in BUT, all entitled roles can request and receive the updated value in a C1 or MSATS Snapshot report.

BUT updates do not trigger CATS notifications. AEMO recommends only performing BUT updates when participants can capture and ingest changes.

6.2.1 csv submission example

A csv payload example for submitting legacy meter replacement plan values is shown below.

```
C,TEST,BLIND UPDATE SUBMISSION,PARTICIPANTID,NEMMCO,2025/05/02,16:12:0
0,,,,NEM,BUT02050415
I,BUS,NMI DATA,1,NMI,FIELD,NEW VALUE
D,BUS,NMI DATA,1,9998887771,LEGACY METER REPLACEMENT PLAN,2026/05/10
D,BUS,NMI DATA,1,9842723212,LEGACY METER REPLACEMENT PLAN,2026/05/10
D,BUS,NMI DATA,1,9483292123,LEGACY METER REPLACEMENT PLAN,2026/05/10
C,END OF REPORT,6
```

For information about the BUT payload format, see **Create Payload** and **CSV Data Format Standard** in Markets Portal Help.

~~10.2.16.2.2~~ **BUT interfaces**

More information about MSATS Web Portal and BUT APIs changes provided in a technical specification update.

~~10.36.3~~ **MSATS standing data**

~~10.3.16.3.1~~ **CATS standing data**

Existing cats_nmi_data CNDnn fields used to record:

- LMRP
- Defect Flag
- Defect Type

- Defect Issuing MC
- Building or Property Name 2

They are displayed in the **NMI Master and NMI Master Summary interfaces** in MSATS.

~~10.46.4~~ **CATS reports**

For FRMPs, C1, C4, C7, and Snapshot reports has the following additional information:

- LMRP date
- Defect flag
- Defect Type – Values will be stored in the MSATS Codes Dated table
- Defect Issuing MC
- Building or Property Name 2

~~10.56.5~~ **Change requests and notifications**

~~10.5.16.5.1~~ **LMRP**

Existing 5050/5051 CRs and validation rules updated to allow DNSPs to update the LMRP value.

Notifications for LMRP updates are sent to all participants with an active association to the NMI.

~~10.5.26.5.2~~ **Site defects**

CRs and notifications:

- CR 5301 – Change Defect Information - retrospective for MCs updating the Defect flag, Defect Type, and Defect Issuing MC:
- Notifications for the Defect flag, Defect Type, and Defect Issuing MC updates are sent to participants with an active association to the NMI.
- For CR 3004/3005 (Exchange of Metering Information) or 3090/3091 (Advanced Meter Exchange), the NMI's Defect flag, Defect Type, and Defect Issuing MC values are automatically set to null when a meter installation code BASIC or MRIM is removed, and a new meter installation code of COMMS* or MRAM is activated. The LegacyMtrReplacementPlan value remains populated.

~~10.5.36.5.3~~ **Embedded network settlement anomalies**

To ensure the NMI datastream status code does not change retrospectively:

- CR 4050/4051 includes a validation to check the embedded network child name is not populated.
- New CR 4060 Change NMI Datastream Details – A child NMI datastream can be updated to set the datastream status as active or inactive.

A retrospective Change NMI Datastream is not available for child NMIs.

~~10.5.46.5.4~~ **ICF-077 Auto populate LCCD field for new NMIs**

When an NMI status is updated from Greenfield “G” to Active “A”, AEMO auto-populates the LCCD field and includes the updated LCCD field in the CR 5050/5051 and CR5060/5061 CATS notification to all participants who are entitled to receive the notifications.

~~10.5.56.5.5~~ **ICF-078**

Affected CR Codes for new field BuildingOrPropertyName2

Change Reason Code	Impacted
2000/1	New LNSP initiating the CR
2020/1	New ENM initiating the CR
2500/1	New LNSP initiating the CR
2520/1	New ENM_M initiating the CR
5001	New LNSP (who must be Current LNSP where the NMI exist) initiating the CR
5021	New ENM (who must be Current ENM where the NMI exist) initiating the CR
5050/1	Current LNSP initiating the CR
5060/1	Current ENM initiating the CR

Change Reason Code	Impacted
5100/1	AEMO initiating standing data update

~~10.66.6~~ **NMI master and NMI master summary interfaces**

The NMI Master and NMI Master Summary interfaces includes new fields:

- LegacyMtrReplacementPlan
- Defect flag
- Defect Type
- Defect Issuing MC
- BuildingOrPropertyName2

~~10.76.7~~ **RM29 standing data quality report**

The RM29 SDQ report ~~contains~~ includes new queries which are sent to MCs ~~when:~~

- ~~• LMRP value is set for ineligible meter types.~~
- ~~• LMRP value is not set for legacy meter types.~~
- ~~• Defect flag, Defect Type, and Defect Issuing MC values are not null for eligible meter types.~~

~~6.7.1 LMRP date is in the past. LMRP IS NULL query~~

<u>Query ID</u>	<u>LMRP IS NULL</u>
<u>Purpose</u>	<u>Identifies BASIC or MRIM NMIs with no LMRP value. Victorian Type 5 Advanced Metering Installation (VICAMI) meters are excluded</u>
<u>Content</u>	<u>The query provides the following H records.</u> <u>QUERYID,STAT DATE,PARTICIPANTID,ROLEID,SOURCE,TABLE,NMI ID,METER SERIAL, SDR KEY 3,STARTDATE,ENDDATE,FIELD,FRMP,LNSP,MITC,LMRP,DEFECT FLAG</u>
<u>Recipient</u>	<u>MC</u>
<u>Delivery</u>	<u>Participant Outbox every week</u>

<u>Data source</u>	<u>CATS</u>
<u>Format</u>	<u>aseXML compliant XML message with csv payload</u>

Example

More information provided in a technical specification update.

6.7.2 LMRP IN PAST query

<u>Query ID</u>	<u>LMRP_IN_PAST</u>
<u>Purpose</u>	<u>Identifies BASIC or MRIM NMIs with a LMRP date in the past and no defect is assigned</u>
<u>Content</u>	<u>The query provides the following H records.</u> <u>QUERYID,STAT DATE,PARTICIPANTID,ROLEID,SOURCE,TABLE,NMI ID,METER_SERIAL,</u> <u>SDR_KEY_3,STARTDATE,ENDDATE,FIELD,FRMP,LNSP,MITC,LMRP,DEFECT_FLAG</u>
<u>Recipient</u>	<u>MC</u>
<u>Delivery</u>	<u>Participant Outbox every week</u>
<u>Data source</u>	<u>CATS</u>
<u>Format</u>	<u>aseXML compliant XML message with csv payload</u>

Example

- More information provided in a technical specification update.

~~More information provided in a technical specification update.~~

10.96.8 Meter exemptions

Meter exemptions include new exemption categories and a malfunction duration.

10.9.16.8.1 Meter malfunction exemption types

4 new malfunction exemption types for rectifying a meter malfunction.

Type	Nature of exemption	Timeframe to rectify
Whole Current Connected NMI	- Faulty meter - Faulty comms module	30 business days

Type	Nature of exemption	Timeframe to rectify
LV CT Connected NMI	- Faulty meter - Faulty comms module - Faulty CT - CT cabling or test block	As specified by the MC
HV Connected NMI	- Faulty meter - Faulty metering unit - Faulty comms module - Faulty CT - Faulty VT - Blown fuse - VT CT cabling or test block - Marshalling box	As specified by the MC
Family Failure	- Whole current meter - LV CT meter - LV current transformer	140 business days for whole current meter

If the end date entered in the exemption exceeds the mandated timeframe to rectify the malfunction, the status is updated to More Info for the Participant to update.

If the status of the exemption is More Info and the required information has not been updated or received by the end date, it will be rejected.

10.9.26.8.2 [MSATS web portal > Meter exemptions](#)

For MCs, the Participant details interface includes the following changes:

- A **Documentation provided** checkbox is added to indicate when additional documentation has been sent to AEMO. This is available for the exemption statuses Create and More Info.

- In the NMI details section, a new substitution method field to indicate the substitution method when the NMI requires substitution prior to remediation.

Participant details

Contact name

DAVID TAGG

Phone number

03 12345678

Email address

msatsfest@seemo.com.au

Exemption details

Date first aware of the issue*

01/06/2024

Exemption category*

MALFUNCTION

Exemption end date*

14/07/2024

Exemption type*

INDIVIDUAL NMI

Action taken*

Authorised Personnel training required for Access

Nature of exemption*

AUTHORISED ACCESS

Documentation Provided

☐

NMI details

NMI*

↑↓

Planned fix date*

↑↓

Substitution required

↑↓

substitution method

6001120305

10/07/2024

N

<<

<

1

>

>>

10.9.36.8.3 Metering Exemptions API

The Submit Meter Exemption request payload and the Get Meter Exemption and Get Meter Exemption List responses includes new fields:

- Documentation Provided – when documentation will be sent after creating or updating an exemption.
- Substitution Method – The substitution method when the substitution flag is set when creating or updating an exemption.

10.9.46.8.4 Validation rules

AEMO validates all NMIs when processing the metering exemption request. The following table describes the validation and rejection reason.

Validation	Reason for rejection
Substitution method information is not provided	Substitute Required is selected but method is not provided

© AEMO 2025 | MSATS - Technical Specification - October 2025

57

Validation	Reason for rejection
An exemption with More Info status is updated within 25 calendar days	The exemption is not updated in the required timeframe
Family Failure type exemption is sent for an extension	An extension is not allowed for this exemption type
Whole Current Connected NMI type exemption is sent for an extension	An extension is not allowed for this exemption type
Reject NMIs that recently had an exemption	NMIs assigned to a Family Failure exemption is included in another Family Failure exemption within the NMI duration validation period
Reject a NMI that recently had an exemption	A NMI assigned to a whole current connected NMI exemption is also included in another individual NMI exemption within the NMI duration validation period

117 ROLR Reports

11.17.1 Process

The ROLR report delivery process is changing from email to files delivered as a .zip file to the Participant File Server Outbox.

To receive ROLR report notifications, you set Participant Outbox protocol for the CATS transaction group to API or FTP. For information about changing your outbox protocol, see [Change your outbox protocol](#) in Markets Portal Help.

7.2 New ROLR Reports

The ROLR report format is a zipped aseXML compliant XML message with csv payload.

The following reports are provided to participants in a ROLR event.

Report name	Description	Recipient
ROLR_CR_CANCEL ROLR_CANCEL_CR	The cancellation of Change Requests (CR) in a ROLR event. It is used to produce a summary count of impacted National Metering Identifiers (NMI)s for each affected participant. This report consists of includes the ROLR_CR_CANCEL following queryies: ROLR_CR_CANCEL	The Suspended Retailer (SR) New FRMP
ROLR_CR_ACCELERATE OLR_ACCELERATE_CR	The acceleration of CRs in a ROLR event. It is used to produce a list of CR transactions where a new Participant ID is taking responsibility on or after the RoLR effective date. The details are reported to each affected participant. This report includes consists of the ROLR CR ACCELERATE following queryies: ROLR_CR_ACCELERATE	New FRMP
ROLR_CR_RAISED_PAROL R_RAISED_CR	CRs raised by SR. It includes role changes, with the new FRMP being mapped by Profile Area (PA). This report includes consists of the ROLR CR RAISED PA following queryies: ROLR_CR_RAISED_PA	New FRMP

Report name	Description	Recipient
<u>ROLR_CR_RAISED_LNSP</u> <u>OLR_RAISED_CR</u>	CRs raised by SR. It includes role changes and mapping the new FRMP by LNSP. This report includes consists the ROLR CR RAISED LNSP of the following queryies: <u>ROLR_CR_RAISED_LNSP</u>	<u>New FRMP</u>
<u>ROLR_CR_NMI_LIST_PAR</u> <u>OLR_NMI_LIST</u>	A list of affected NMIs where the new FRMP is mapped by PA or LNSP. This report can include the following queries: - <u>ROLR_NMI_PA_SR_FRMP_CURRENT_ROLE</u> <u>S</u> - <u>ROLR_NMI_PA_SR_LR_NEW_LR</u> - <u>ROLR_NMI_PA_SR_FRMP_CURRENT_ROLE</u> <u>S</u> - <u>ROLR_NMI_PA_SR_FRMP_NEW_FRMP</u> - <u>ROLR_NMI_LNSP_SR_LR_CURRENT_ROLE</u> <u>S</u> - <u>ROLR_NMI_LNSP_SR_LR_NEW_LR</u> - <u>ROLR_NMI_LNSP_SR_FRMP_CURRENT_RO</u> <u>LES</u> - <u>ROLR_NMI_LNSP_SR_FRMP_NEW_FRMP</u>	<u>LNSP</u> <u>New FRMP</u> <u>SR</u>

More details provided in a technical specification update.

11.27.3 Discontinued ROLR reports

The following ROLR reports are discontinued from 1 December 2025.

Report number	Report name	Recipient
ROLR_002	RoLR/FRMP Summary Report Type B	MDP
ROLR_003	RoLR/FRMP Summary Report Type C	LNSP
ROLR_004	RoLR/FRMP Summary Report Type D	RoLR as the new FRMP
ROLR_005	RoLR/FRMP Summary Report Type D	The Suspended Retailer (SR)
ROLR_006	RoLR/FRMP Summary Report Type E	MPB
ROLR_007	RoLR/LR Summary Report Type A	Each Jurisdiction
ROLR_008	RoLR/LR Summary Report Type B	MDP
ROLR_009	RoLR/LR Summary Report Type C	LNSP

Report number	Report name	Recipient
ROLR_010	RoLR/LR Summary Report Type D	Each RoLR (either as the new FRMP, as the new LR or both)
ROLR_011	RoLR/LR Summary Report Type D	The Suspended Retailer (SR)
ROLR_012	RoLR/LR Summary Report Type E	Each MPB
ROLR_014	RoLR/LR NMI List - SR is LR	All relevant participants
ROLR_027	CRs to change FRMP still in progress for NMIs that have changed due to RoLR Event (by Jurisdiction)	Each Jurisdiction

128 FAQs

12.18.1 Why is AEMO updating the hazard field?

The approach for the hazard field update is still being determined. ~~The hazard field may be removed, but this is TBC.~~

12.28.2 When will the draft r46 schema be available?

24 April 2025.

12.38.3 How do I find the latest electricity schema?

There are two electricity schema types - B2B and B2M. You can find the latest aseXML schema in MSATS:

- B2M – In the **Participant > Participant schema** interface. See  [View your B2M schema](#)
- B2B – In the **B2B Browser > Transforms and Protocol** interface. See  [B2B protocols](#)

12.48.4 Is an aseXML schema version specific to either gas or electricity?

Yes, some versions do not apply to the gas or electricity market. Additionally, an electricity schema version can contain B2B and B2M changes, only B2B changes, or only B2M changes.

12.58.5 When does a participant receive the new LCCD value?

The LCCD update is an automated change triggered through specified CRs. When AEMO detects an NMI transitioning from a “Greenfield” (G) to “active” (A), a batch process is initiated to update the LCCD field. This field is in the completion notification for the change request.

12.68.6 Does the change request notification include the LCCD tag when the NMI status updates from G to A?

When the NMI status updates from “Greenfield” (G) to “active” (A), the change is reflected in the 5050 or 5051 change request. The LCCD value is included in the notification sent to participants.

12.78.7 Why is the r46 aseXML schema being released on 26 October 2025, but the effective date is 1 December 2025?

To minimise impacts to all Market Participants, AEMO aims to only release one schema version per year. Participants are obligated to populate and maintain the LegacyMtrReplacementPlan field from 26 October 2025.

The schema also includes new and updated fields to support Rule changes effective from 1 December 2025. Participants can send r46 transactions with **B2B Procedures v3.9** elements prior to 1 December 2025 only if supported under bilateral agreement.

8.8 How should participants send an address with 2 house numbers and 2 house number suffixes in B2B transactions between 26 October 2025 and 1 December 2025?

The B2B Change B002/22 introduces the HouseNumberToSuffix field to align the way house number ranges are expressed across both B2B and B2M markets. Prior to this change:

- B2M supports house number ranges in a single element.
- B2B relies on sending two separate elements to express ranges, due to the absence of HouseNumberTo and HouseNumberToSuffix.

This discrepancy is resolved in the aseXML r46 schema and B2B v3.9 Procedures.

The table below provides aseXML address structure examples.

8.9 Why is the 4060 CR being created?

The 4060 CR manages Embedded Network Child NMI datastreams. The new CR allows the MDP to prospectively activate and inactivate an existing datastream. Retrospective activation and inactivation are no longer allowed.

When creating a new Embedded Network Child NMI, the 4001 CR can still be used to retrospectively create the initial datastream. Once created, the 4060 CR maintains the datastream.

8.10 Why are embedded Network Child NMIs only allowed to be prospectively changed?

Retrospective changes to Embedded Network Child NMIs cause settlement anomalies, affecting the settlement of the NEM. Removing retrospective activation and inactivation of Embedded Network Child NMI Datastreams eliminates this impact.

8.11 Are other NMIs affected by the new 4060 CR?

Existing NEM connected NMIs will still use the 4050 / 4051 CRs to retrospectively and prospectively activate NMI datastreams. The introduction of Secondary Settlements Points (SSPs) as part of the FTA Rules change does not allow retrospective datastream changes.

8.12 When do Site Defects details get removed in MSATS?

To assist participants in maintaining the Defect Flag, Defect Type and Defect Issuing MC fields, MSATS removes the values when a CR 3004 / 3005 or 3090 / 3091 is completed, a Basic or MRIM meter is removed, and a COMMS or MRAM meter is installed.

When the Site Defect values are removed, the PEND and COM notification includes the updated fields as shown in the following example.

```
<?xml version="1.0" ?>
<ase:aseXML xmlns:ase="urn:aseXML:r46"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
```

```

xsi:schemaLocation="urn:aseXML:r46
http://www.nemmco.com.au/aseXML/schemas/r46/aseXML_r46.xsd">
  <Header>
    <From description="Australian Energy Market Operator
Limited">NEMMCO</From>
    <To description="Market Participant">MKTPART</To>
    <MessageID>NEMMCO-MSG-999112971</MessageID>
    <MessageDate>2025-03-25T02:38:08+10:00</MessageDate>
    <TransactionGroup>CATS</TransactionGroup>
    <Priority>Medium</Priority>
    <SecurityContext>NEMMCOBATCH</SecurityContext>
    <Market>NEM</Market>
  </Header>
  <Transactions>
    <Transaction transactionID="NOTF-8888980297"
transactionDate="2025-03-25T00:12:03+10:00"
initiatingTransactionID="CAT888274387">
      <CATSNotification version="r29">
        <Role>NEM</Role>
        <RoleStatus>C</RoleStatus>
      <ChangeRequest>
        <Participant>MKTPART</Participant>
        <RequestID>9991203710</RequestID>
        <ChangeStatusCode>PEND</ChangeStatusCode>
        <ChangeData>
          <ChangeReasonCode>3090</ChangeReasonCode>
          <ActualChangeDate>2025-03-24</ActualChangeDate>
          <NMIStandingData xsi:type="ase:ElectricityStandingData"
version="r46">
            <NMI checksum="7">5555449002</NMI>
            <MasterData>
              <DefectFlag xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance" xsi:nil="true"/>
              <DefectType xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance" xsi:nil="true"/>
              <DefectIssuingMC
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:nil="true"/>
            </MasterData>
            <DataStreams>
              <DataStream>
                <Suffix>E1</Suffix>
                <ProfileName>NOPROF</ProfileName>
                <AveragedDailyLoad>11</AveragedDailyLoad>
                <DataStreamType>Interval</DataStreamType>
                <Status>A</Status>
              </DataStream>
            </DataStreams>
            <MeterRegister>
              <Meter>
                <SerialNumber>MTR1234</SerialNumber>
                <InstallationTypeCode>MRIM</InstallationTypeCode>
                <Status>R</Status>
                <RegisterConfiguration>

```

```

        <Register>
        <RegisterID>001</RegisterID>
        <NetworkTariffCode>NAST11</NetworkTariffCode>
        <UnitOfMeasure>KWH</UnitOfMeasure>
        <TimeOfDay>INTERVAL</TimeOfDay>
        <Multiplier>1</Multiplier>
        <DialFormat>5.1</DialFormat>
        <Suffix>E1</Suffix>
        <ControlledLoad>NO</ControlledLoad>
        <ConsumptionType>Actual</ConsumptionType>
        <Status>R</Status>
    </Register>
</RegisterConfiguration>
</Meter>
<Meter>
    <SerialNumber>COMMS1234</SerialNumber>
    <InstallationTypeCode>MRAM</InstallationTypeCode>
    <Use>AVERAGE</Use>
    <Manufacturer>METERMAN</Manufacturer>
    <Model>MODEL</Model>
    <Status>C</Status>
    <RegisterConfiguration>
        <Register>
        <RegisterID>E2</RegisterID>
        <NetworkTariffCode>TARABC</NetworkTariffCode>
        <UnitOfMeasure>KWH</UnitOfMeasure>
        <TimeOfDay>INTERVAL</TimeOfDay>
        <Multiplier>1</Multiplier>
        <DialFormat>6.3</DialFormat>
        <Suffix>E2</Suffix>
        <ControlledLoad>NO</ControlledLoad>
        <ConsumptionType>Actual</ConsumptionType>
        <Status>C</Status>
    </Register>
    </RegisterConfiguration>
</Meter>
</MeterRegister>
</NMISstandingData>
</ChangeData>
</ChangeRequest>
<JurisdictionCode>VIC</JurisdictionCode>
<NMIClassificationCode>LARGE</NMIClassificationCode>
<ObjectionEndDate>2025-03-24</ObjectionEndDate>
</CATSNotification>
</Transaction>
    <Transaction transactionID="NOTF-8888980309"
transactionDate="2025-03-25T00:12:10+10:00"
initiatingTransactionID="CAT888274387">
        <CATSNotification version="r29">
            <Role>NEM</Role>
            <RoleStatus>C</RoleStatus>
        </CATSNotification>
    </Transaction>
</ChangeRequest>
    <Participant>MARKPART</Participant>

```

```

<RequestID>9991203710</RequestID>
<ChangeStatusCode>COM</ChangeStatusCode>
<ChangeData>
  <ChangeReasonCode>3090</ChangeReasonCode>
  <ActualChangeDate>2025-03-24</ActualChangeDate>
  <NMISTandingData xsi:type="ase:ElectricityStandingData"
version="r46">
    <NMI checksum="7">5555449002</NMI>
    <MasterData>
      <DefectFlag xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance" xsi:nil="true"/>
      <DefectType xmlns:xsi="http://www.w3.org/2001/XMLSchema-
instance" xsi:nil="true"/>
      <DefectIssuingMC
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:nil="true"/>
    </MasterData>
    <DataStreams>
      <DataStream>
        <Suffix>E1</Suffix>
        <ProfileName>NOPROF</ProfileName>
        <AveragedDailyLoad>11</AveragedDailyLoad>
        <DataStreamType>Interval</DataStreamType>
        <Status>A</Status>
      </DataStream>
    </DataStreams>
    <MeterRegister>
      <Meter>
        <SerialNumber>MET1234</SerialNumber>
        <InstallationTypeCode>MRIM</InstallationTypeCode>
        <Status>R</Status>
        <RegisterConfiguration>
          <Register>
            <RegisterID>001</RegisterID>
            <NetworkTariffCode>TARABC</NetworkTariffCode>
            <UnitOfMeasure>KWH</UnitOfMeasure>
            <TimeOfDay>INTERVAL</TimeOfDay>
            <Multiplier>1</Multiplier>
            <DialFormat>5.1</DialFormat>
            <Suffix>E1</Suffix>
            <ControlledLoad>NO</ControlledLoad>
            <ConsumptionType>Actual</ConsumptionType>
            <Status>R</Status>
          </Register>
        </RegisterConfiguration>
      </Meter>
      <Meter>
        <SerialNumber>COMMS1234</SerialNumber>
        <InstallationTypeCode>MRAM</InstallationTypeCode>
        <Use>AVERAGE</Use>
        <Manufacturer>METERMAN</Manufacturer>
        <Model>MODEL</Model>
        <Status>C</Status>
        <RegisterConfiguration>

```

```

        <Register>
            <RegisterID>E2</RegisterID>
            <NetworkTariffCode>TARABC</NetworkTariffCode>
            <UnitOfMeasure>KWH</UnitOfMeasure>
            <TimeOfDay>INTERVAL</TimeOfDay>
            <Multiplier>1</Multiplier>
            <DialFormat>6.3</DialFormat>
            <Suffix>E2</Suffix>
            <ControlledLoad>NO</ControlledLoad>
            <ConsumptionType>Actual</ConsumptionType>
            <Status>C</Status>
        </Register>
    </RegisterConfiguration>
</Meter>
</MeterRegister>
</NMIStandingData>
</ChangeData>
</ChangeRequest>
<JurisdictionCode>VIC</JurisdictionCode>
<NMIClassificationCode>LARGE</NMIClassificationCode>
<ObjectionEndDate>2025-03-24</ObjectionEndDate>
</CATSNotification>
</Transaction>
</Transactions>
</ase:aseXML>

```

~~13.9~~ Implementation

~~13.19.1~~ Transition

See [aseXML r46](#).

~~13.29.2~~ Upgrade options

Option 1

- Update local processes and technical interfaces to suit the changes.

Option 2

- If changes are irrelevant to participants' business processes and technical interfaces, ignore this release.

~~13.39.3~~ Implications

To maintain systems in-line with AEMO's market systems, participants need to:

- Review and assess the impact on their market systems with respect to the changes implemented as part of this Release.
- Change their systems prior to the implementation of this Release.
- Schedule staff and resources to upgrade their market systems for the production implementation of this Release.

~~13.49.4~~ Risks

Participants do not receive the new B2M and B2B aseXML schema fields unless they upgrade to r46.

1410 Terms

14.110.1 Rules Terms

You can find the following terms defined in the [National Electricity Rules \(NER\)](#) and the [Settlements Residue Auction Rules](#).

Term
AEMO
AEMO Markets Portal
AEMO Website
Market Participants
Maximum Units
NEM
Product
Region
Regional reference prices
Registered Participant

14.210.2 Glossary

You can find a full list of AEMO glossary terms in [Industry Terminology](#) on AEMO's website.

Abbreviation/Term	Explanation
AEST	Australian Eastern Standard Time
B2B	Business-to-business
B2M	Business-to-market
CT	Current transformer
DNSP	Distribution Network Service Provider
ERCF	Electricity Retail Change Forum
EMMS	Electricity Market Management System; software, hardware, network, and related processes to implement the wholesale energy market
ENM	Embedded Network Manager
FCAS	Frequency Control Ancillary Services
FRMP	Financially Responsible Market Participant
HV	High voltage
ICF	Industry Change Form
<u>ITWG</u>	<u>IT Working Group</u>
LCCD	Last Consumer Change Date
LNSP	Local network service provider
LMRP	Legacy meter replacement plan
LV	Low Voltage
MC	Meter Coordinator
MP	Metering Provider
MDP	Metering Data Provider
MSATS	Market Settlement and Transfer Solution for retail electricity
MSR	Metering Services Review

Abbreviation/Term	Explanation
MW	Megawatt
NER	National Electricity Rules
One In All In	A process where all meters on a shared fuse arrangement are upgraded at the same time
PQD	Power Quality Data. Smart meter data including volts, amps, and phase angle delivered to DNSP
Release	MSATS - Technical Specification - October 2025
Release Dates	Pre-production: Tuesday 2 September 2025 Production: Sunday 26 October 2025
ROLR	Retailers of Last Resort
TBC	To be confirmed

1511 References

Guide to AEMO's e-Hub APIs: Provides details about using AEMO's e-Hub as an interface to communicate information with AEMO. It assists Wholesale electricity and gas participants developing their own APIs.

Guide to Information Systems: Provides guidance for *Registered Participants* and interested parties about AEMO's participant electricity market systems.

Guide to User Rights Management: Assists participant administrators (PAs) to use the user rights management functions in the MSATS Web Portal.

Retail Electricity Market Glossary and Framework: assist participants of the Retail Electricity Market to understand the overall framework. It also contains a list of terms used in the Retail Electricity Market Procedures and a full list of NEM procedures, guidelines, and documents.

A1. aseXML r46 Draft Files and Changes

Schema files

Schema Release r46

aseXML_r46.xsd

Rename the changed file version to aseXML_r46.xsd.

```
<xsd:schema xmlns="urn:aseXML:r46"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
targetNamespace="urn:aseXML:r46" version="r46"
xsi:schemaLocation="urn:aseXML:r46 aseXML_r46.xsd">
<xsd:include schemaLocation="CATSTableReplication_r46.xsd">
<xsd:include schemaLocation="ClientInformation_r46.xsd">
<xsd:include schemaLocation="Common_r46.xsd">
<xsd:include schemaLocation="Electricity_r46.xsd">
<xsd:include schemaLocation="ElectricityMasterStandingData_r46.xsd"/>
<xsd:include schemaLocation="Events_r46.xsd">
<xsd:include schemaLocation="OneWayNotification_r46.xsd">
```

CATSTableReplication_r46.xsd

- Update ElectricityNMIMasterRow, ElectricityNMIMasterRowBDT, and ElectricityCATSChangeRequestNMIMasterRow version attribute from r43 to r46.

```

<!-- Electricity NMI Standing Data Replication Row Types -->
  <xsd:complexType name="ElectricityNMIMasterRow">
    <xsd:annotation>
      <xsd:documentation>
Purpose - Row of the Electricity NMI Master Standing Data table
MSATS Data Model Table - CATS NMI Data
Replication Table Name - ElectricityNMIMaster
      </xsd:documentation>
    </xsd:annotation>
    <xsd:complexContent>
      <xsd:extension base="ReplicationDateRangeRow">
        <xsd:sequence>
          <xsd:element name="NMI" type="NMIBase"/>
          <xsd:group ref="ElectricityNMIMasterGroup"/>
        </xsd:sequence>
        <xsd:attribute name="version" type="r46"
use="optional" default="r46"/>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>

<!-- BDT Row Types -->
  <xsd:complexType name="ElectricityNMIMasterRowBDT">
    <xsd:annotation>
      <xsd:documentation>
Purpose - Row of the Electricity NMI Master Standing Data table
extended by BDTStatus and Event for Bulk Data Tool
MSATS Data Model Table - CATS NMI Data
Replication Table Name - ElectricityNMIMaster
      </xsd:documentation>
    </xsd:annotation>
    <xsd:complexContent>
      <xsd:extension base="ReplicationDateRangeRow">
        <xsd:sequence>
          <xsd:group ref="ElectricityNMIMasterGroup"/>
          <xsd:element name="BDTStatus" type="BDTStatus"
minOccurs="0"/>
          <xsd:element name="Event" type="Event"
minOccurs="0" maxOccurs="unbounded"/>
        </xsd:sequence>
        <xsd:attribute name="version" type="r46"
use="optional" default="r46"/>
      </xsd:extension>
    </xsd:complexContent>
  </xsd:complexType>

  <xsd:complexType name="ElectricityCATSChangeRequestNMIMasterRow">
    <xsd:annotation>
      <xsd:documentation>
Purpose - Row of the Electricity CATS Change Request NMI Master
Standing Data table
MSATS Data Model Table - CATS Inbound NMI Data
Replication Table Name - ElectricityCATSChangeRequestNMIMaster

```

```

        </xsd:documentation>
    </xsd:annotation>
    <xsd:complexContent>
        <xsd:extension base="ReplicationBaseRow">
            <xsd:sequence>
                <xsd:element name="RequestID"
type="CATSRequestIdentifier"/>
            <xsd:group ref="ElectricityNMIMasterGroup"/>
        </xsd:sequence>
        <xsd:attribute name="version" type="r46"
use="optional" default="r46"/>
    </xsd:extension>
</xsd:complexContent>
</xsd:complexType>

```

- Rename the changed file version to CATSTableReplication_r46.xsd

ClientInformation_r46.xsd

- Update BuildingOrPropertyName element length from 30 to 50 characters
- Increase AustralianStreetName element length from 30 to 45 characters

```

<xsd:simpleType name="AustralianBuildingOrPropertyName">
    <xsd:annotation>
        <xsd:documentation>
Purpose - Define building or property name as per Australian Standard
AS4590
        </xsd:documentation>
    </xsd:annotation>
    <xsd:restriction base="xsd:string">
        <xsd:minLength value="1"/>
        <xsd:maxLength value="50"/>
    </xsd:restriction>
</xsd:simpleType>

<xsd:simpleType name="AustralianStreetName">
    <xsd:annotation>
        <xsd:documentation>
Purpose - Define street name as per Australian Standard AS4590
        </xsd:documentation>
    </xsd:annotation>
    <xsd:restriction base="xsd:string">
        <xsd:pattern value="[\p{L}\p{N}\s\-' ]{1,45}"/>
    </xsd:restriction>
</xsd:simpleType>

```

- Add BuildingOrPropertyName2 element to existing complex types
AustralianStructuredAddressComponents and
AustralianStructuredAddressPartialComponents

The maxOccurs value for BuildingOrPropertyName under AustralianStructuredAddressComponents complex type is retained for submitting two BuildingOrPropertyName values up until 30 November 2025. For more information, see BuildingOrPropertyName element transition

```

<xsd:complexType name="AustralianStructuredAddressPartialComponents">
  <xsd:sequence>
    <xsd:element name="FlatOrUnit" minOccurs="0">
      <xsd:complexType>
        <xsd:sequence>
          <xsd:element name="FlatOrUnitType"
type="AustralianFlatOrUnitType" nillable="true" minOccurs="0"/>
          <xsd:element name="FlatOrUnitNumber"
type="AustralianFlatOrUnitNumber" nillable="true" minOccurs="0"/>
        </xsd:sequence>
      </xsd:complexType>
    </xsd:element>
    <xsd:element name="FloorOrLevel" minOccurs="0">
      <xsd:complexType>
        <xsd:sequence>
          <xsd:element name="FloorOrLevelType"
type="AustralianFloorOrLevelType" nillable="true" minOccurs="0"/>
          <xsd:element name="FloorOrLevelNumber"
type="AustralianFloorOrLevelNumber" nillable="true" minOccurs="0"/>
        </xsd:sequence>
      </xsd:complexType>
    </xsd:element>
    <xsd:element name="BuildingOrPropertyName"
type="AustralianBuildingOrPropertyName" nillable="true" minOccurs="0"
maxOccurs="2" />
    <xsd:element name="BuildingOrPropertyName2"
type="AustralianBuildingOrPropertyName" nillable="true"
minOccurs="0"/>
    <xsd:element name="LocationDescriptor"
type="AustralianLocationDescriptor" nillable="true" minOccurs="0"/>
    <xsd:element name="House" minOccurs="0" maxOccurs="2">
</xsd:complexType>

.
.
.
<xsd:complexType name="AustralianStructuredAddressComponents">
  <xsd:sequence>
    <xsd:element name="FlatOrUnit" minOccurs="0">
      <xsd:complexType>
        <xsd:sequence>
          <xsd:element name="FlatOrUnitType"
type="AustralianFlatOrUnitType" nillable="true"/>
          <xsd:element name="FlatOrUnitNumber"
type="AustralianFlatOrUnitNumber" nillable="true"/>
        </xsd:sequence>
      </xsd:complexType>
    </xsd:element>
    <xsd:element name="FloorOrLevel" minOccurs="0">
      <xsd:complexType>
        <xsd:sequence>
          <xsd:element name="FloorOrLevelType"
type="AustralianFloorOrLevelType" nillable="true"/>

```

```

        <xsd:element name="FloorOrLevelNumber"
type="AustralianFloorOrLevelNumber" nillable="true" minOccurs="0"/>
    </xsd:sequence>
</xsd:complexType>
</xsd:element>
    <xsd:element name="BuildingOrPropertyName"
type="AustralianBuildingOrPropertyName" nillable="true"
minOccurs="0"/>
    <xsd:element name="BuildingOrPropertyName2"
type="AustralianBuildingOrPropertyName" nillable="true"
minOccurs="0"/>
    <xsd:element name="LocationDescriptor"
type="AustralianLocationDescriptor" nillable="true" minOccurs="0"/>
    <xsd:element name="House" minOccurs="0" maxOccurs="2">
        <xsd:complexType>

```

- Rename the changed file version to ClientInformation_r46.xsd

Common_r46.xsd

- Increase HazardDescription element length from 80 to 100 characters.

```

<xsd:simpleType name="HazardDescription">
    <xsd:restriction base="xsd:string">
        <xsd:maxLength value="100"/>
    </xsd:restriction>
</xsd:simpleType>

```

- Rename the changed file version to Common_r46.xsd

Electricity_r46.xsd

- Add new element DefectFlag as string type with length=1

```

<xsd:simpleType name="DefectFlag">
    <xsd:annotation>
        <xsd:documentation>
Purpose - Flag to indicate if the metering coordinator encounter
customer-site defects preventing meter exchanges
        </xsd:documentation>
    </xsd:annotation>
    <xsd:restriction base="xsd:string">
        <xsd:maxLength value="1"/>
    </xsd:restriction>
</xsd:simpleType>

```

- Add new element DefectType as string type with length=15

```
<xsd:simpleType name="DefectType">
  <xsd:annotation>
    <xsd:documentation>
      Purpose - Indicates what type of customer-site defect which prevents
      meter exchanges encountered by the metering coordinator
    </xsd:documentation>
  </xsd:annotation>
  <xsd:restriction base="xsd:string">
    <xsd:maxLength value="15"/>
  </xsd:restriction>
</xsd:simpleType>
```

- Add 3 new ServiceOrderSubType - Install Meter Isolation Device, Temporary Isolation-Scoping Request, Temporary Isolation-One In All In

```

<xsd:simpleType name="ServiceOrderSubType">
  <xsd:annotation>
    <xsd:documentation>Purpose - Defines a list of valid
Service Order types supported by the participants</xsd:documentation>
  </xsd:annotation>
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="After Disconnection For Non-
Payment"/>
    <xsd:enumeration value="Remove Fuse"/>
    <xsd:enumeration value="Disconnect at Pillar-Box Pit Or
Pole-Top"/>
    <xsd:enumeration value="Install Controlled Load"/>
    <xsd:enumeration value="Move Meter"/>
    <xsd:enumeration value="Install Meter"/>
    <xsd:enumeration value="Install Meter Isolation Device"/>
    <xsd:enumeration value="Remove Meter"/>
    <xsd:enumeration value="Exchange Meter"/>
    <xsd:enumeration value="Check Read"/>
    <xsd:enumeration value="Final Read"/>
    <xsd:enumeration value="Allocate NMI"/>
    <xsd:enumeration value="Establish Permanent Supply"/>
    <xsd:enumeration value="Establish Temporary Supply"/>
    <xsd:enumeration value="Establish Temporary In
Permanent"/>
    <xsd:enumeration value="Local Meter Disconnection"/>
    <xsd:enumeration value="Meter Investigation-Inspect"/>
    <xsd:enumeration value="Meter Investigation-Test"/>
    <xsd:enumeration value="Meter Reconfiguration"/>
    <xsd:enumeration value="Recipient Discretion"/>
    <xsd:enumeration value="Remote"/>
    <xsd:enumeration value="Supply Abolishment"/>
    <xsd:enumeration value="Supply Alteration"/>
    <xsd:enumeration value="Tariff Change"/>
    <xsd:enumeration value="Temporary Isolation"/>
    <xsd:enumeration value="Temporary Isolation-Group
Supply"/>
    <xsd:enumeration value="Temporary Isolation - Scoping
Request"/>
    <xsd:enumeration value="Temporary Isolation - One In All
In"/>
    <xsd:enumeration value="Change Timeswitch Settings"/>
    <xsd:enumeration value="Reseal Device"/>
    <xsd:enumeration value="Retrospective Move-in"/>
    <xsd:enumeration value="Move-in"/>
    <xsd:enumeration value="New Reading Required"/>
    <xsd:enumeration value="Physical Visit"/>
  </xsd:restriction>
</xsd:simpleType>

```

- Add enumerated values for SORDResponseCode to support MP-initiated Service Orders Responses for defects and One In All In.

```

<xsd:simpleType name="SORDResponseCode">
  <xsd:annotation>
    <xsd:documentation>Purpose - Defines a list of valid
response code for different types of service
orders</xsd:documentation>
  </xsd:annotation>
  <xsd:restriction base="xsd:string">
    <xsd:enumeration value="Customer On-Site"/>
    <xsd:enumeration value="Customer Prevented"/>
    <xsd:enumeration value="De-energisation Not Completed Due
To A Re-energisation"/>
    <xsd:enumeration value="Documentation Not Provided"/>
    <xsd:enumeration value="Metering Problem"/>
    <xsd:enumeration value="Meter Reading Only Undertaken Due
To Prior Re-energisation"/>
    <xsd:enumeration value="New Customer On-Site"/>
    <xsd:enumeration value="No Supply"/>
    <xsd:enumeration value="Other"/>
    <xsd:enumeration value="Reading Problem"/>
    <xsd:enumeration value="Request Submitted By Another
Initiator"/>
    <xsd:enumeration value="Initiator Cancellation"/>
    <xsd:enumeration value="Sensitive Load"/>
    <xsd:enumeration value="Recipient Cancellation"/>
    <xsd:enumeration value="Unable To Access"/>
    <xsd:enumeration value="Unknown Load"/>
    <xsd:enumeration value="Unsafe"/>
    <xsd:enumeration value="Tariff Change Not Approved"/>
    <xsd:enumeration value="Inadequate infrastructure"/>
    <xsd:enumeration value="No Comms"/>
    <xsd:enumeration value="Life Support"/>
    <xsd:enumeration value="Meter Not Retrieved"/>
    <xsd:enumeration value="Metering not compatible with
proposed Tariff Change"/>
    <xsd:enumeration value="Shared Supply Point"/>
    <xsd:enumeration value="Site Already Energised"/>
    <xsd:enumeration value="Unknown Connection Status"/>
    <xsd:enumeration value="Defect"/>
    <xsd:enumeration value="Appointment Required"/>
    <xsd:enumeration value="Comms Refused"/>
    <xsd:enumeration value="Coordination Failure"/>
    <xsd:enumeration value="Demolished"/>
    <xsd:enumeration value="Dog"/>
    <xsd:enumeration value="Incorrect Service Order"/>
    <xsd:enumeration value="Mismatch with Standing Data"/>
    <xsd:enumeration value="Natural Event"/>
    <xsd:enumeration value="No Access - Network Support
Required"/>
    <xsd:enumeration value="No Adult Present"/>
    <xsd:enumeration value="Not FRMP"/>
    <xsd:enumeration value="Obstruction"/>
    <xsd:enumeration value="Shared Fuse - Scoping Required"/>
    <xsd:enumeration value="Site Not Ready"/>
  </xsd:restriction>
</xsd:simpleType>

```

```
<xsd:enumeration value="Unable To Isolate"/>
<xsd:enumeration value="Unable To Locate Site"/>
</xsd:restriction>
</xsd:simpleType>
```

- Update version attribute of ElectricityServiceOrderType and ElectricityServiceOrderNotificationData elements from r36 to r46.
- Update version attribute of ElectricityServiceOrderDetails element from r41 to r46

```

<xsd:complexType name="ElectricityServiceOrderType">
  <xsd:complexContent>
    <xsd:extension base="ServiceOrderTypeBase">
      <xsd:sequence>
        <xsd:element name="WorkType">
          <xsd:complexType>
            <xsd:simpleContent>
              <xsd:extension
base="ServiceOrderType">
                <xsd:attribute
name="workSubType" type="ServiceOrderSubType" use="optional"/>
              </xsd:extension>
            </xsd:simpleContent>
          </xsd:complexType>
        </xsd:element>
      </xsd:sequence>
      <xsd:attribute name="version" type="r46"
use="optional" default="r46"/>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ElectricityServiceOrderDetails">
  <xsd:annotation>
    <xsd:documentation>Purpose - Defines the data type for
new connection and meter additions and alterations
v36.1. WL. Change LifeSupport to be optional field.
    </xsd:documentation>
  </xsd:annotation>
  <xsd:complexContent>
    <xsd:extension base="ServiceOrderRequestData">
      <xsd:sequence>
        <xsd:element
name="CustomerConsultationRequired" type="xsd:boolean"/>
        <xsd:element name="InstallationType"
type="InstallationType" minOccurs="0"/>
        <xsd:element name="SupplyPhase"
type="SupplyPhase" minOccurs="0"/>
        <xsd:element name="AverageDailyLoad"
type="AveragedDailyLoad" minOccurs="0"/>
        <xsd:element name="CustomerType"
type="CustomerType" minOccurs="0"/>
        <xsd:element name="MeteringType"
type="MeteringType" minOccurs="0"/>
        <xsd:element name="OffPeakRequirements"
type="SpecialComments" minOccurs="0"/>
        <xsd:element name="MaximumDemand"
type="MeterDemand" minOccurs="0"/>
        <xsd:element name="ServiceTime"
type="ServiceTimeType" minOccurs="0"/>
        <xsd:element name="SwitchingServiceRequired"
type="SwitchingServiceRequired" minOccurs="0"/>
        <xsd:element name="ConfirmedDe-energisation"
type="xsd:boolean" minOccurs="0"/>
      </xsd:sequence>
    </xsd:extension>
  </xsd:complexContent>
</xsd:complexType>

```

```

<xsd:element name="License" type="License"
minOccurs="0"/>
<xsd:element name="MeterLicense" type="License"
minOccurs="0"/>
<xsd:element name="De-energisationReason"
type="De-energisationReason" minOccurs="0"/>
<xsd:element name="LifeSupport" type="YesNo"
minOccurs="0"/>
<xsd:element name="Co-ordinationRequired"
type="YesNo" minOccurs="0"/>
<xsd:element name="RegClassification"
type="RegClassification" minOccurs="0"/>
<xsd:element name="PurposeOfRequest"
type="PurposeOfRequest" minOccurs="0"/>
<xsd:element name="Escalation"
type="Escalation" minOccurs="0"/>
<xsd:element name="ExemptionCode"
type="xsd:string" minOccurs="0"/>
</xsd:sequence>
<xsd:attribute name="version" type="r46"
use="optional" default="r46"/>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>
<xsd:complexType name="ElectricityServiceOrderNotificationData">
<xsd:annotation>
<xsd:documentation>Schema -
Electricity</xsd:documentation>
</xsd:annotation>
<xsd:complexContent>
<xsd:extension base="ServiceOrderNotificationData">
<xsd:sequence>
<xsd:element name="ServiceOrderStatus"
type="ServiceOrderStatus"/>
<xsd:element name="ResponseCode"
type="SORDResponseCode" minOccurs="0"/>
<xsd:element name="ActualDateTime"
type="xsd:dateTime"/>
<xsd:element name="Product" type="Product"/>
</xsd:sequence>
<xsd:attribute name="version" type="r46"
use="optional" default="r46"/>
</xsd:extension>
</xsd:complexContent>
</xsd:complexType>

```

- Update version attribute of ElectricityStandingData element from r43 to r46

```

<xsd:complexContent>
  <xsd:extension base="NMIStandingData">
    <xsd:sequence>
      <xsd:element name="MasterData"
type="ElectricityMasterStandingData" minOccurs="0"/>
      <xsd:element name="RoleAssignments"
type="RoleAssignments" minOccurs="0"/>
      <xsd:element name="DataStreams"
type="ElectricityDataStreams" minOccurs="0"/>
      <xsd:element name="MeterRegister"
type="ElectricityMeters" minOccurs="0"/>
    </xsd:sequence>
    <xsd:attribute name="version" type="r46"
use="optional" default="r46"/>
  </xsd:extension>
</xsd:complexContent>

```

- Increase FormNumber element length from 15 to 20 characters.
- Reduce FormReference element length from 30 to 20 characters.

```

<xsd:complexType name="DocumentReferenceType">
  <xsd:sequence>
    <xsd:element name="FormReference" minOccurs="0">
      <xsd:simpleType>
        <xsd:restriction base="xsd:string">
          <xsd:maxLength value="20"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:element>
    <xsd:element name="FormNumber" minOccurs="0">
      <xsd:simpleType>
        <xsd:restriction base="xsd:string">
          <xsd:maxLength value="20"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:element>
  </xsd:sequence>
</xsd:complexType>SORD

```

- Rename the changed file version to Electricity_r46.xsd.

ElectricityEnumerations.xsd

- Add Remediation Advised enumeration to the PurposeOfRequest element.
- Add enumerations Family Failure, LMRP, and One In All In to the RegClassification element.


```

- Remediation Advised
Version 2.0 deletion
- Family Failure
</xsd:documentation>
</xsd:annotation>
<xsd:restriction base="xsd:string">
  <xsd:maxLength value="40"/>
  <xsd:enumeration value="New connection"/>
  <xsd:enumeration value="Additional Meter"/>
  <xsd:enumeration value="Part of BTS Temp to Perm"/>
  <xsd:enumeration value="Part of supply alteration"/>
  <xsd:enumeration value="Bidirectional flows at premises"/>
  <xsd:enumeration value="Bypassed Customer"/>
  <xsd:enumeration value="Communications Remove"/>
  <xsd:enumeration value="Communications Install"/>
  <xsd:enumeration value="Revenue Protection"/>
  <xsd:enumeration value="Site Abolishment"/>
  <xsd:enumeration value="Fault"/>
  <xsd:enumeration value="Remediation Advised"/>
  <xsd:enumeration value="Retailer Led"/>
  <xsd:enumeration value="None"/>
  <xsd:enumeration value="Other"/>
</xsd:restriction>
</xsd:simpleType>

```

- Add One In All In to the enumerated list for ReasonForNotice element.

```

<xsd:simpleType name="ReasonForNotice">
  <xsd:annotation>
    <xsd:documentation>
      Purpose - Define the fixed Reasons for Notice
      Version 1.0 additions
      - Meter Family Failure
      - Accuracy Failure
      - Timeswitch/Controlled Load Failure
      - Contactor Failure
      - No Display
      - Communication Failure
      - Meter Verification
      - Malfunction
      - Area Event
      - Metrology Threshold Breach
      - Meter Bypassed
      - Physical Damage
      - Theft/Tampering
      - Other
      Version 2.0 additions
      - One In All In
    </xsd:documentation>
  </xsd:annotation>
  <xsd:restriction base="xsd:string">
    <xsd:maxLength value="50"/>
    <xsd:enumeration value="Meter Family Failure"/>
    <xsd:enumeration value="Accuracy Failure"/>
    <xsd:enumeration value="Timeswitch/Controlled Load
Failure"/>
    <xsd:enumeration value="Contactor Failure"/>
    <xsd:enumeration value="No Display"/>
    <xsd:enumeration value="Communication Failure"/>
    <xsd:enumeration value="Meter Verification"/>
    <xsd:enumeration value="Malfunction"/>
    <xsd:enumeration value="One In All In"/>
    <xsd:enumeration value="Area Event"/>
    <xsd:enumeration value="Metrology Threshold Breach"/>
    <xsd:enumeration value="Meter Bypassed"/>
    <xsd:enumeration value="Physical Damage"/>
    <xsd:enumeration value="Theft/Tampering"/>
    <xsd:enumeration value="Other"/>
  </xsd:restriction>
</xsd:simpleType>

```

ElectricityMasterStandingData r46.xsd

- Add elements LegacyMeterReplacementPlan, DefectFlag, DefectType, and DefectIssuingMC to ElectricityNMIMasterGroup group and ElectricityMasterStandingData type.

```

<xsd:group name="ElectricityNMIMasterGroup">
  <xsd:annotation>
    <xsd:documentation>
      Purpose - Common NMI Master elements across Standing Data and Change
      Requests
    </xsd:documentation>
  </xsd:annotation>
  <xsd:sequence>
    <xsd:element name="JurisdictionCode"
      type="JurisdictionCode" nillable="true" minOccurs="0"/>
    <xsd:element name="NMIClassificationCode"
      type="NMIClassificationCode" nillable="true" minOccurs="0"/>
    <xsd:element name="TransmissionNodeIdentifier"
      type="TransmissionNodeIdentifier" nillable="true" minOccurs="0"/>
    <xsd:element name="DistributionLossFactorCode"
      type="DistributionLossFactorCode" nillable="true" minOccurs="0"/>
    <xsd:element name="ParentEmbeddedNetworkIdentifier"
      type="EmbeddedNetworkIdentifier" nillable="true" minOccurs="0"/>
    <xsd:element name="ChildEmbeddedNetworkIdentifier"
      type="EmbeddedNetworkIdentifier" nillable="true" minOccurs="0"/>
    <xsd:element name="Address"
      type="AustralianPartialAddress" nillable="true" minOccurs="0"/>
    <xsd:element name="Aggregate" type="YesNo" nillable="true"
      minOccurs="0"/>
    <xsd:element name="Status" type="NMIStatusCode"
      nillable="true" minOccurs="0"/>
    <xsd:element name="FlatOrUnitType"
      type="AustralianFlatOrUnitType" nillable="true" minOccurs="0"/>
    <xsd:element name="FlatOrUnitNumber"
      type="AustralianFlatOrUnitNumber" nillable="true" minOccurs="0"/>
    <xsd:element name="FloorOrLevelType"
      type="AustralianFloorOrLevelType" nillable="true" minOccurs="0"/>
    <xsd:element name="FloorOrLevelNumber"
      type="AustralianFloorOrLevelNumber" nillable="true" minOccurs="0"/>
    <xsd:element name="BuildingOrPropertyName"
      type="AustralianBuildingOrPropertyName" nillable="true"
      minOccurs="0"/>
    <xsd:element name="BuildingOrPropertyName2"
      type="AustralianBuildingOrPropertyName" nillable="true"
      minOccurs="0"/>
    <xsd:element name="LocationDescriptor"
      type="AustralianLocationDescriptor" nillable="true" minOccurs="0"/>
    <xsd:element name="HouseNumber"
      type="AustralianHouseNumber" nillable="true" minOccurs="0"/>
    <xsd:element name="HouseNumberSuffix"
      type="AustralianHouseNumberSuffix" nillable="true" minOccurs="0"/>
    <xsd:element name="HouseNumberTo"
      type="AustralianHouseNumber" nillable="true" minOccurs="0"/>
    <xsd:element name="HouseNumberToSuffix"
      type="AustralianHouseNumberSuffix" nillable="true" minOccurs="0"/>
    <xsd:element name="HouseNumber2"
      type="AustralianHouseNumber" nillable="true" minOccurs="0"/>
  </xsd:sequence>
</xsd:group>

```

```

<xsd:element name="HouseNumber2Suffix"
type="AustralianHouseNumberSuffix" nillable="true" minOccurs="0"/>
<xsd:element name="LotNumber" type="AustralianLotNumber"
nillable="true" minOccurs="0"/>
<xsd:element name="SectionNumber" type="SectionNumber"
nillable="true" minOccurs="0"/>
<xsd:element name="DPNumber" type="DepositedPlanNumber"
nillable="true" minOccurs="0"/>
<xsd:element name="StreetName" type="AustralianStreetName"
nillable="true" minOccurs="0"/>
<xsd:element name="StreetType" type="AustralianStreetType"
nillable="true" minOccurs="0"/>
<xsd:element name="StreetSuffix"
type="AustralianStreetSuffix" nillable="true" minOccurs="0"/>
<xsd:element name="AddressLine1"
type="AustralianAddressLine" nillable="true" minOccurs="0"/>
<xsd:element name="AddressLine2"
type="AustralianAddressLine" nillable="true" minOccurs="0"/>
<xsd:element name="AddressLine3"
type="AustralianAddressLine" nillable="true" minOccurs="0"/>
<xsd:element name="SuburbOrPlaceOrLocality"
type="AustralianSuburbOrPlaceOrLocality" nillable="true"
minOccurs="0"/>
<xsd:element name="StateOrTerritory"
type="AustralianStateOrTerritory" nillable="true" minOccurs="0"/>
<xsd:element name="PostCode" type="AustralianPostCode"
nillable="true" minOccurs="0"/>
<xsd:element name="DeliveryPointIdentifier"
type="AustralianDeliveryPointIdentifier" nillable="true"
minOccurs="0"/>
<xsd:element name="GNAFPID"
type="GeocodedNationalAddressFilePersistentIdentifier" nillable="true"
minOccurs="0"/>
<xsd:element name="DistanceFromSubstation"
type="DistanceFromSubstation" nillable="true" minOccurs="0"/>
<xsd:element name="VoltageType" type="VoltageType"
nillable="true" minOccurs="0"/>
<xsd:element name="PoleNumber" type="PoleNumber"
nillable="true" minOccurs="0"/>
<xsd:element name="AccessDetails" type="AccessDetail"
nillable="true" minOccurs="0"/>
<xsd:element name="FeederClass" type="FeederClass"
nillable="true" minOccurs="0"/>
<xsd:element name="CustomerClassificationCode"
type="EMSDCustomerClassificationCode" nillable="true" minOccurs="0"/>
<xsd:element name="CustomerThresholdCode"
type="EMSDCustomerThresholdCode" nillable="true" minOccurs="0"/>
<xsd:element name="TransmissionNodeIdentifier2"
type="TransmissionNodeIdentifier" nillable="true" minOccurs="0"/>
<xsd:element name="SharedIsolationPointFlag"
type="SharedIsolationPointFlag" nillable="true" minOccurs="0"/>
<xsd:element name="MeterMalfunctionExemptionNumber"
type="MeterMalfunctionExemptionNumber" nillable="true" minOccurs="0"/>

```

```
<xsd:element name="MeterMalfunctionExemptionExpiryDate"
type="xsd:date" nillable="true" minOccurs="0"/>
<xsd:element name="ConnectionConfiguration"
type="ConnectionConfiguration" nillable="true" minOccurs="0"/>
<xsd:element name="LastConsumerChangeDate" type="xsd:date"
nillable="true" minOccurs="0"/>
<xsd:element name="LegacyMtrReplacementPlan"
type="xsd:date" nillable="true" minOccurs="0"/>
<xsd:element name="DefectFlag" type="DefectFlag"
nillable="true" minOccurs="0"/>
<xsd:element name="DefectType" type="DefectType"
nillable="true" minOccurs="0"/>
<xsd:element name="DefectIssuingMC" type="PartyIdentifier"
nillable="true" minOccurs="0"/>
</xsd:sequence>
</xsd:group>
```

```

<xsd:complexType name="ElectricityMasterStandingData">
  <xsd:sequence>
    <xsd:element name="JurisdictionCode"
type="JurisdictionCode" nillable="true" minOccurs="0"/>
    <xsd:element name="NMIClassificationCode"
type="NMIClassificationCode" nillable="true" minOccurs="0"/>
    <xsd:element name="TransmissionNodeIdentifier"
type="TransmissionNodeIdentifier" nillable="true" minOccurs="0"/>
    <xsd:element name="DistributionLossFactorCode"
type="DistributionLossFactorCode" nillable="true" minOccurs="0"/>
    <xsd:element name="ParentEmbeddedNetworkIdentifier"
type="EmbeddedNetworkIdentifier" nillable="true" minOccurs="0"/>
    <xsd:element name="ChildEmbeddedNetworkIdentifier"
type="EmbeddedNetworkIdentifier" nillable="true" minOccurs="0"/>
    <xsd:element name="Address"
type="AustralianPartialAddress" nillable="true" minOccurs="0"/>
    <xsd:element name="Aggregate" type="YesNo" nillable="true"
minOccurs="0"/>
    <xsd:element name="Status" type="NMIStatusCode"
nillable="true" minOccurs="0"/>
    <xsd:element name="DistanceFromSubstation"
type="DistanceFromSubstation" nillable="true" minOccurs="0"/>
    <xsd:element name="VoltageType" type="VoltageType"
nillable="true" minOccurs="0"/>
    <xsd:element name="PoleNumber" type="PoleNumber"
nillable="true" minOccurs="0"/>
    <xsd:element name="AccessDetails" type="AccessDetail"
nillable="true" minOccurs="0"/>
    <xsd:element name="FeederClass" type="FeederClass"
nillable="true" minOccurs="0"/>
    <xsd:element name="CustomerClassificationCode"
type="EMSDCustomerClassificationCode" nillable="true" minOccurs="0"/>
    <xsd:element name="CustomerThresholdCode"
type="EMSDCustomerThresholdCode" nillable="true" minOccurs="0"/>
    <xsd:element name="ControlEquipments"
type="ControlEquipments" nillable="true" minOccurs="0"/>
    <xsd:element name="NetworkDevices" type="NetworkDevices"
nillable="true" minOccurs="0"/>
    <xsd:element name="EnergisationStatus"
type="EnergisationStatus" nillable="true" minOccurs="0"/>
    <xsd:element name="PrimaryVoltage" type="PrimaryVoltage"
nillable="true" minOccurs="0"/>
    <xsd:element name="FromDate" type="xsd:date"
minOccurs="0"/>
    <xsd:element name="ToDate" type="xsd:date" minOccurs="0"/>
    <xsd:element name="TransmissionNodeIdentifier2"
type="TransmissionNodeIdentifier" nillable="true" minOccurs="0"/>
    <xsd:element name="SharedIsolationPointFlag"
type="SharedIsolationPointFlag" nillable="true" minOccurs="0"/>
    <xsd:element name="MeterMalfunctionExemptionNumber"
type="MeterMalfunctionExemptionNumber" nillable="true" minOccurs="0"/>
    <xsd:element name="MeterMalfunctionExemptionExpiryDate"
type="xsd:date" nillable="true" minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>

```

```

        <xsd:element name="ConnectionConfiguration"
type="ConnectionConfiguration" nillable="true" minOccurs="0"/>
        <xsd:element name="LastConsumerChangeDate" type="xsd:date"
nillable="true" minOccurs="0"/>
        <xsd:element name="LegacyMtrReplacementPlan"
type="xsd:date" nillable="true" minOccurs="0"/>
        <xsd:element name="DefectFlag" type="DefectFlag"
nillable="true" minOccurs="0"/>
        <xsd:element name="DefectType" type="DefectType"
nillable="true" minOccurs="0"/>
        <xsd:element name="DefectIssuingMC" type="PartyIdentifier"
nillable="true" minOccurs="0"/>
    </xsd:sequence>
</xsd:complexType>

```

- Rename the changed file version to ElectricityMasterStandingData_r46.xsd.

Enumerations.xsd

- Add new enumerations Lower Level – LL, Penthouse – PTHS, Platform – PL, Podium – PDM to AustralianFloorOrLevelType.
- Increase AustralianFloorOrLevelType element length from 2 to 4 characters.

```

<xsd:simpleType name="AustralianFloorOrLevelType">
    <xsd:restriction base="xsd:string">
        <xsd:maxLength value="4"/>
        <xsd:enumeration value="B"/>
        <xsd:enumeration value="FL"/>
        <xsd:enumeration value="G"/>
        <xsd:enumeration value="L"/>
        <xsd:enumeration value="LB"/>
        <xsd:enumeration value="LG"/>
        <xsd:enumeration value="M"/>
        <xsd:enumeration value="OD"/>
        <xsd:enumeration value="P"/>
        <xsd:enumeration value="UG"/>
        <xsd:enumeration value="RT"/>
        <xsd:enumeration value="SB"/>
        <xsd:enumeration value="LL"/>
        <xsd:enumeration value="PTHS"/>
        <xsd:enumeration value="PL"/>
        <xsd:enumeration value="PD"/>
    </xsd:restriction>
</xsd:simpleType>

```

- For AustralianStreetType, a comment mapping aseXML abbreviation names - AS4590.1:2017 Abbreviation names – Name:
– FRTL - FITR - FIRETRAIL

- AV - AVE - AVENUE
- CR - CRSE - CRESCENT
- GLDE – GLD - GLADE
- PWY – PKWY – PARKWAY

Version 7.0 addition of comments

-- AS4590.1:2017 Abbreviation – aseXML Abbreviation – Name
-- FRTL – FITR – FIRETRAIL (FTRL (AS4590) is to be mapped to FITR
(aseXML))
-- AV – AVE – AVENUE
-- CR – CRSE – CRESCENT
-- GLDE – GLD – GLADE
-- PWY – PKWY – PARKWAY

- For AustralianFlatOrUnitType, a comment mapping aseXML abbreviation names - AS4590.1:2017 Abbreviation names – Name:

- DUPL - DUP - DUPLEX
- FCTY - FY - FACTORY
- FLAT – F - FLAT
- MBTH – MB - MARINE BERTH
- OFFC – OFF - OFFICE
- ROOM - RM - ROOM
- STLL - SL - STALL
- UNIT - U - UNIT
- WHSE - WE - WAREHOUSE

Version 7.0 name mapping as per AS4590.1:2017		
--	AS4590.1:2017 Abbreviation	aseXML Abbreviation - Name
--	DUPL - DUP - DUPLEX	
--	FCTY - FY - FACTORY	
--	FLAT - F - FLAT	
--	MBTH - MB - MARINE BERTH	
--	OFFC - OFF - OFFICE	
--	ROOM - RM - ROOM	
--	STLL - SL - STALL	
--	UNIT - U - UNIT	
--	WHSE - WE - WAREHOUSE	

A15.

Events r46.xsd

Events r46.xsd file to replace Events r43.xsd.

```
<xsd:simpleType name="r46">
  <xsd:annotation>
    <xsd:documentation>Purpose - Release r46
    identifier.</xsd:documentation>
  </xsd:annotation>
  <xsd:restriction base="ReleaseIdentifier">
    <xsd:enumeration value="r46"/>
  </xsd:restriction>
</xsd:simpleType>
```

OneWayNotification r46.xsd

- Update version attribute of MeterFaultAndIssueNotification element from r36 to r46.
- Rename the changed file version to OneWayNotification r46.xsd.

```

<xsd:complexType name="MeterFaultAndIssueNotification">
  <xsd:sequence>
    <xsd:element name="NMI" type="NMI"/>
    <xsd:element name="DateIdentified" type="xsd:date"/>
    <xsd:element name="StartDate" type="xsd:date"
minOccurs="0"/>
    <xsd:element name="StartTime" type="xsd:time"
minOccurs="0"/>
    <xsd:element name="EndDate" type="xsd:date"
minOccurs="0"/>
    <xsd:element name="Duration" type="Duration"
minOccurs="0"/>
    <xsd:element name="SupplyOn" type="YesNo"/>
    <xsd:element name="SupplyOff" type="SupplyOff"
minOccurs="0"/>
    <xsd:element name="Meters" type="ElectricityMeters"
minOccurs="0"/>
    <xsd:element name="ReasonForNotice"
type="ReasonForNotice"/>
    <xsd:element name="Notes" type="NotificationNotes"
minOccurs="0"/>
  </xsd:sequence>
  <xsd:attribute name="version" type="r46" use="optional"
default="r46"/>
</xsd:complexType>

```

aultAndIssueNotification element from r36 to r46

A2. Version history

v1.01

- Renames LMRP field to LegacyMtrReplacementPlan
- For Site Defects, removes proposed CR5300 Change Defect Information (Prospective)
- For Site Defects, revises Originating MC field to Defect Issuing MC
- Changes to CRs 3004/3005 and 3090/3091 details where the new meter is a COMMS* or MRAM
- Adds note about BuildingorPropertyName2 in **B2B aseXML schema impact summary**
- Updates version to several aseXML schema files

v1.00

- Adds changes to meter exemptions.
- Adds information about CR notifications when populating the LCCD field.
- Correction to current B2M version.
- Adds FAQs.

v0.03

This is the initial draft.